REV.	ECN NO.	DATE	SIGN	DESCRIPTION

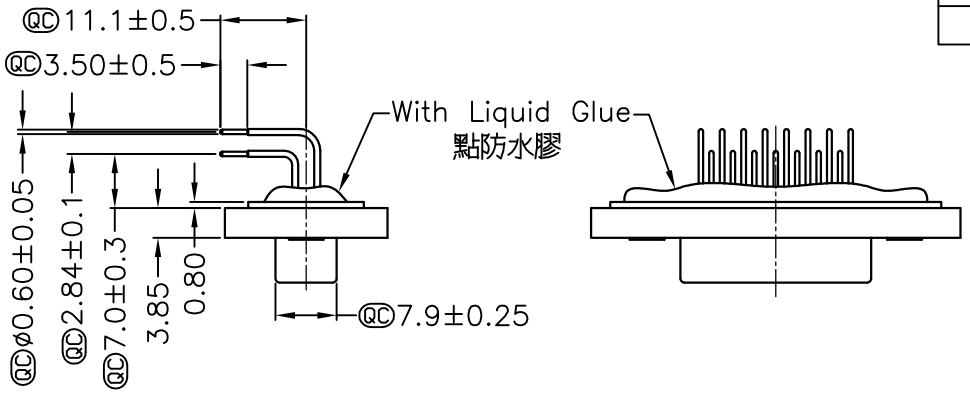

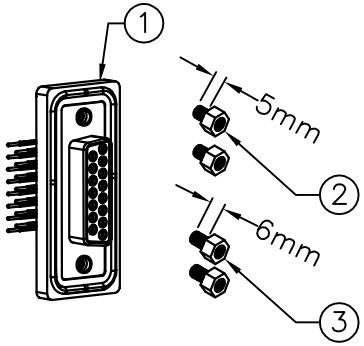

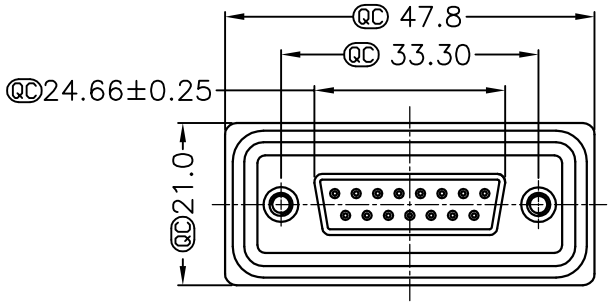

ALTW
DCC. DEPT.
CONFIDENTIAL
2007.01.22
ISSUED

Note:
* QC Important Dimension.
* Waterproof Rate : IP68
  IP68:1M of depth of water 24 hours
  （防水等級: IP68 ）
  （ IP68:1米水深 24小時 ）
* Do Mating Test After Glued
  點膠後,須作對插測試
* D-SUB Conn. :Black Core , PBT
* Plastic Jacket : Black , Nylon+GF
* Pin : Copper Alloy , Gold Plated
* Ring : Light Blue,Silicone
* Screw : Copper Alloy,Nickel Plated,#4-40 UNC

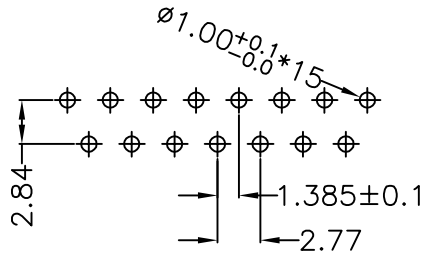

15 Pin Female connector
PCB Pin Layout
Scale 2:1

ALTW
CONFIDENTIAL
2006.12.09
R&D DEPT.



Screw L=5.0 For Panel Thickness
Under 1.2mm
適用板厚為1.2mm以下

Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm
適用板厚為1.2~2.0mm

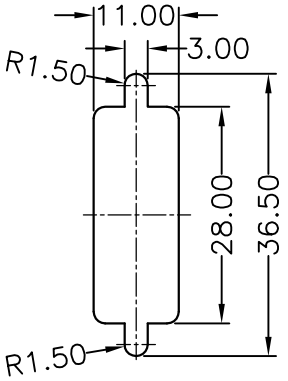

Recommended Panel Cut-Out
建 議 挖 孔 尺 寸

UNIT:mm	TITLE: D-SUB Conn. Panel Screw DB15P F Conn. F Pin	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO: SDB-15PFFP-SR8001	DRAWN BY: Gao Ling	DATE: 2006/12/09
TOLERANCE .X ±0.25, .XX ±0.1, .XXX ±0.05, ANGLES ±1°	SCALE: Free / SHEET: 1 OF 1		DWG NO: SDB-15PFFP-SR8001	CHECKED BY: Simon	DATE: 2006/12/09
	REV: A / SIZE: A4 / QC :Inspection Item		CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2006/12/09

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.