


RECOMMEND PWB LAYOUT
GENERAL TOLERANCE 0.05MM

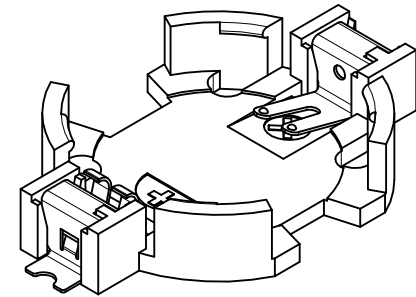





NOTES:

1. MATERIALS:

HOUSING:HIGH TEMPERATURE PLASTICS, WHITE,UL 94V-0;
POSITIVE TERMINAL:COPPER ALLOY THICKNESS:0.20mm;
NEGATIVE TERMINAL:COPPER ALLOY THICKNESS:0.20mm;

2. PACKAGING :TAPE & REEL

3. COMPLIANT TO RoHS DIRECTIVE 2011/65/EU AND ELV 2000/53/EC.

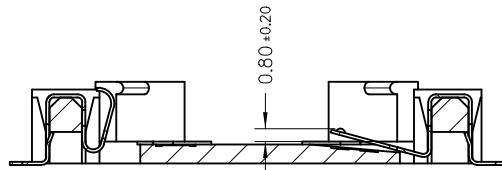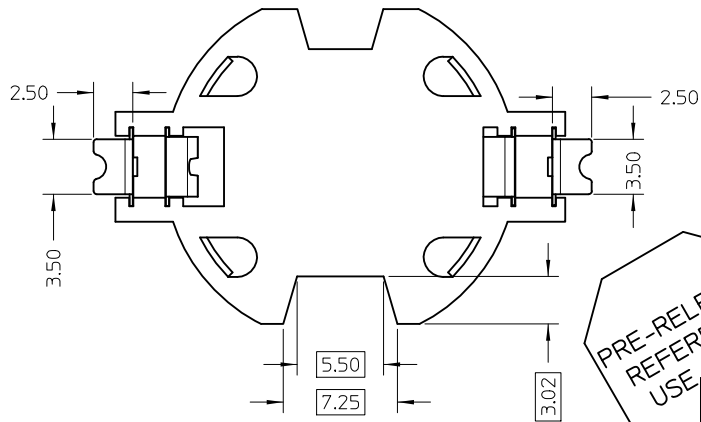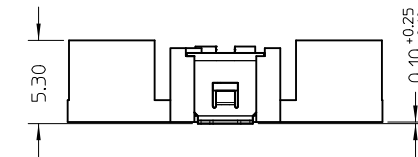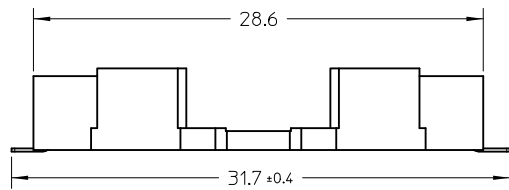

SECTION Z-Z

PRE-RELEASE
REFERENCE
USE ONLY

1053890021	1.27 MICRON MIN SOLDERABILITY NICKEL OVERALL
1053890011	0.375 MICRON MIN GOLD PLATING ON CONTACT AREA,1.27 MICRON MIN MATTE TIN ON SOLDER AREA.
1053890001	GOLD FLASH PLATING OVERALL.
PART NO.	PLATING SPECIFICATION

PROPOSAL EC NO: DRWN:WJHUO CHKD: APPR:	DESCRIPTION 2014/05/23	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY WJHUO	DATE 2013/12/05	TITLE SD DRAWING FOR BUTTON CELL HOLDER SMT TYPE				
		4 PLACES	± ---	± ---	1 PLACE	± 0.20	± ---	CHECKED BY	DATE	molex SD-105389-001		
		3 PLACES	± ---	± ---	0 PLACE	± ---	APPROVED BY	DATE				
1		ANGULAR ± 3 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-105389-001	SHEET NO. 1 OF 1			