


Amphenol LTW M12 Push-In Field Installable

For Your Fast & Easy Wire Termination

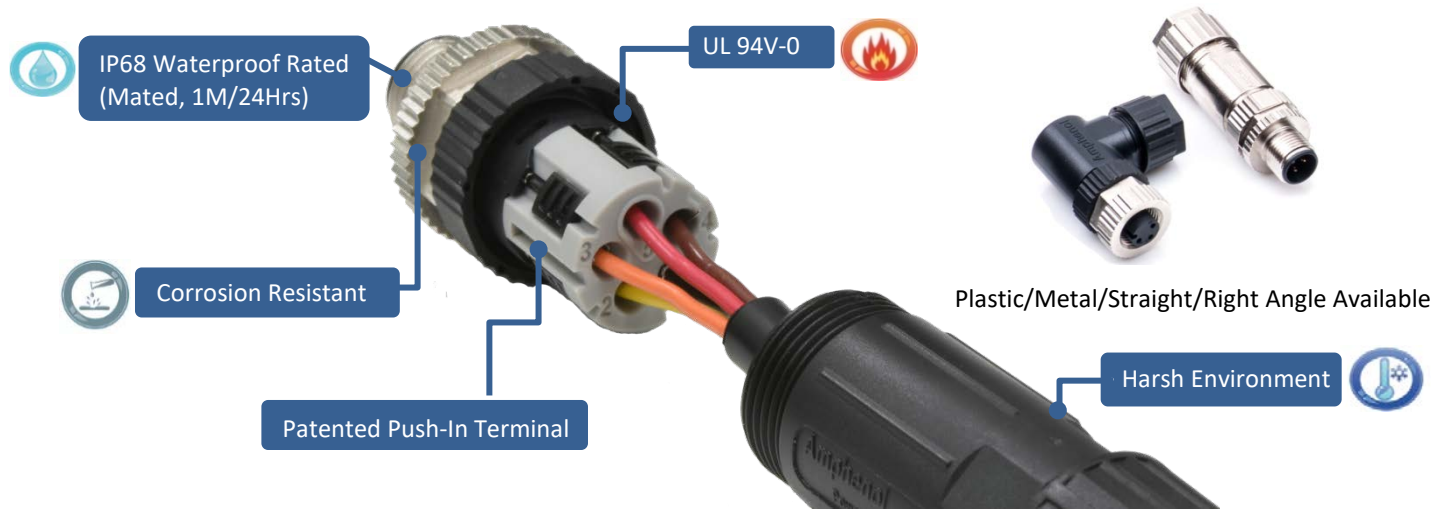


3 Simple Steps


STEP 1
Unlock Switch



STEP 2
Insert Wires



STEP 3
Click & Lock



Coding	A-coded				B-coded			D-coded			
Contacts	3	4	5	6	8	3	4	5	3	4	5
Current Rating	4A		2A			4A			4A		
Contact Configuration											

● Available Now

Application:



Broadband Wireless Access



Industrial Automation



Surveillance Systems



MRT / Railway

Specification:

General Characteristics

Connector Type	Male and Female	Waterproof Rating	IP68 Mated (1M / 24Hrs)
Locking Mechanism	Screw Type	Wire Size AWG	22 AWG ~ 24 AWG
Coding	A, B and D-Coded	Cable OD	4.0~8.0 mm
Temperature Range	-40°C ~ 105°C	Mechanical Operation	100 Cycles Min.

