


4 PAIR 26 AWG INDUSTRIAL ETHERNET CATEGORY 5E CABLE

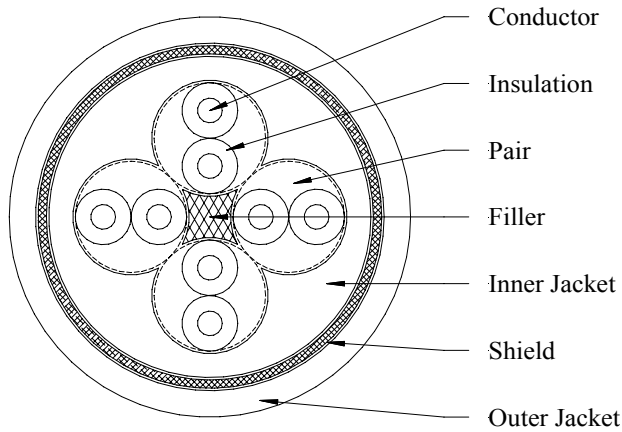

CONSTRUCTION

Pair Component

Conductor: 26 AWG 19/38 Bare Copper, 0.019 Inch Diameter
Insulation: 0.0105 Inches of High Density Polyethylene, 0.040 Inch Diameter
Pair: 2 Insulated Conductors Twisted Together, Lay Lengths Varied Between Pairs to Minimize Crosstalk

Final Assembly

Core: Cotton Filler
Layer 1: 4 Pairs (#1-4) Cabled Around Core
Inner Jacket: 0.016 Inches of Thermoplastic Elastomer, Color - Natural
Outer Shield: 38 AWG Tin Plated Copper Braid, 80% Coverage
Jacket: 0.016 Inches of Polyurethane, Color - Orange
Diameter: 0.243 Inches Nominal
Print Legend (Black Ink): "MADISON CABLE 4PR/26 AWG Industrial Ethernet Category 5e RoHS COMPLIANT {Date Code}"¹

¹ Date Code is a 4-digit code with the first two digits identifying the calendar week and the last two identifying the calendar year of manufacturing. Example - 0206 for cable manufactured in the second week of January 2006.

COLOR CODE

Pair #	Conductor #1	Conductor #2
1	White	Blue
2	White	Orange
3	White	Green
4	White	Brown

ELECTRICAL CHARACTERISTICS

Frequency (MHz)	Attenuation ² (dB/100 m Nom.)	NEXT ³ (dB Min.)	PSNEXT ⁴ (dB Min.)	ACR ⁵ (dB Min.)
0.772	2.7	67.0	64.0	65.2
1	3.0	65.3	62.3	63.3
4	6.2	56.3	53.3	52.2
8	8.7	51.8	48.8	46.0
10	9.8	50.3	47.3	43.8
16	12.3	47.2	44.2	39.0
20	14.0	45.8	42.8	36.5
25	15.6	44.3	41.3	33.9
31.25	17.6	42.9	39.9	31.2
62.5	25.5	38.4	35.4	21.4
100	33.0	35.3	32.3	13.3

² Values shown are examples. Attenuation at any frequency between 0.772 and 100 MHz is $1.5(1.967\sqrt{f} + 0.023 + 0.050/\sqrt{f})$ dB/100 meter Maximum, where f is frequency in MHz and measurement is on a length ≥ 100 meters.

³ Values shown are examples. NEXT at any frequency between 0.772 and 100 MHz is $35.3 - 15 \text{Log}_{10}(f/100)$ dB Minimum, where f is frequency in MHz and measurement is on a length ≥ 100 meters.

⁴ Values shown are examples. Power Sum NEXT at any frequency between 0.772 and 100 MHz is $32.3 - 15 \text{Log}_{10}(f/100)$ dB Minimum, where f is frequency in MHz and measurement is on a length ≥ 100 meters. Power Sum Crosstalk is defined as total energy that a pair receives when all other pairs are energized.

⁵ Attenuation Crosstalk Ratio. The difference between attenuation and crosstalk measured in dB at given frequency.

Frequency (MHz)	ELFEXT ⁶ (dB Min.)	PSELFEXT ⁷ (dB Min.)	RL ⁸ (dB Min.)
1	63.8	60.8	20.0
4	51.8	48.8	23.0
8	45.7	42.7	24.5
10	43.8	40.8	25.0
16	39.7	36.7	25.0
20	37.8	34.8	25.0
25	35.8	32.8	24.2
31.25	33.9	30.9	23.3
62.5	27.9	24.9	20.7
100	23.8	20.8	19.0

⁶ Values shown are examples. ELFEXT at any frequency between 1 and 100 MHz is $23.8 - 20 \text{Log}_{10}(f/100)$ dB Minimum, where f is frequency in MHz and measurement is on a length ≥ 100 meters.

⁷ Values shown are examples. Power Sum ELFEXT at any frequency between 1 and 100 MHz is $20.8 - 20 \text{Log}_{10}(f/100)$ dB Minimum, where f is frequency in MHz and measurement is on a length ≥ 100 meters.

⁸ Values shown from 1-100 MHz are examples. Return Loss at any frequency between 1 and 10 MHz is $20 + 5 \text{Log}_{10}(f)$ dB Minimum, between 10 and 20 MHz is 25 Minimum, and between 20 and 100 MHz is $25 - 7 \text{Log}_{10}(f/20)$ dB Minimum, where f is frequency in MHz and measurement is on a length ≥ 100 meters.

REVISION HISTORY

1	07/17/08	HA	Initial Release
2	11/06/08	DC	Revised Electricals, Added Flex Life, et. al.

Tyco Electronics **MADISON Cable**
 125 Goddard Memorial Drive • Worcester, MA 01603 USA
 Tel: (508) 752-2884 Toll-Free: (877) MADISON Fax: (508) 752-4230

Spec Number:	101-7794
Part Number:	08QELLF003
Customer:	
Customer #:	

Prepared By:	D.M. Card		Page
Reviewed By:	T. Grzysiewicz	M. Dupuis	1 of 2

Users should evaluate the suitability of this product for their application. Contact factory for latest revision of specification. Tyco Electronics reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to the Buyer.

4 PAIR 26 AWG INDUSTRIAL ETHERNET CATEGORY 5E CABLE

Impedance⁹: 100 ± 15 Ohms
Pair-to-Ground Capacitance Unbalance: 330 pF/100 m Maximum @ 1 kHz
Velocity of Propagation: 67% Nominal
Time Delay Skew: 45 ns/100 m Maximum from 1 – 100 MHz
Conductor DC Resistance: 14.0 Ohms/100 m Maximum @ 20°C
Conductor DC Resistance Unbalance: 5% Maximum

⁹ An Impedance-Like Function Fit to Data By Least Square Method.


MECHANICAL CHARACTERISTICS

Flex Life: 2 Million cycles Minimum. Tested on a C-track machine at @ 1 ½ inch minimum bend radius.

SAFETY CERTIFICATION

RoHS Compliance: In Accordance to European Directive 2002/95/EC, Issue 13.2.2003

Under Development

 <p>125 Goddard Memorial Drive • Worcester, MA 01603 USA Tel: (508) 752-2884 Toll-Free: (877) MADISON Fax: (508) 752-4230</p>		REVISION HISTORY			
		1	07/17/08	HA	Initial Release
		2	11/06/08	DC	Revised Electricals, Added Flex Life, et. al.
Spec Number:	101-7794				
Part Number:	08QELLF003				
Customer:		Prepared By:	D.M. Card		Page
Customer #:		Reviewed By:	T. Grzysiewicz	M. Dupuis	2 of 2

Users should evaluate the suitability of this product for their application. Contact factory for latest revision of specification. Tyco Electronics reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to the Buyer.