
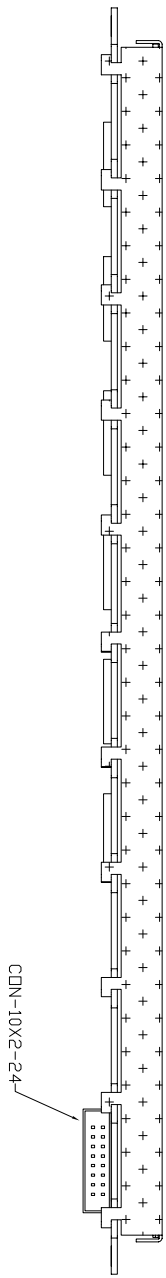


(DOT SIZE FOR CUSTOMER REFERENCE ONLY)

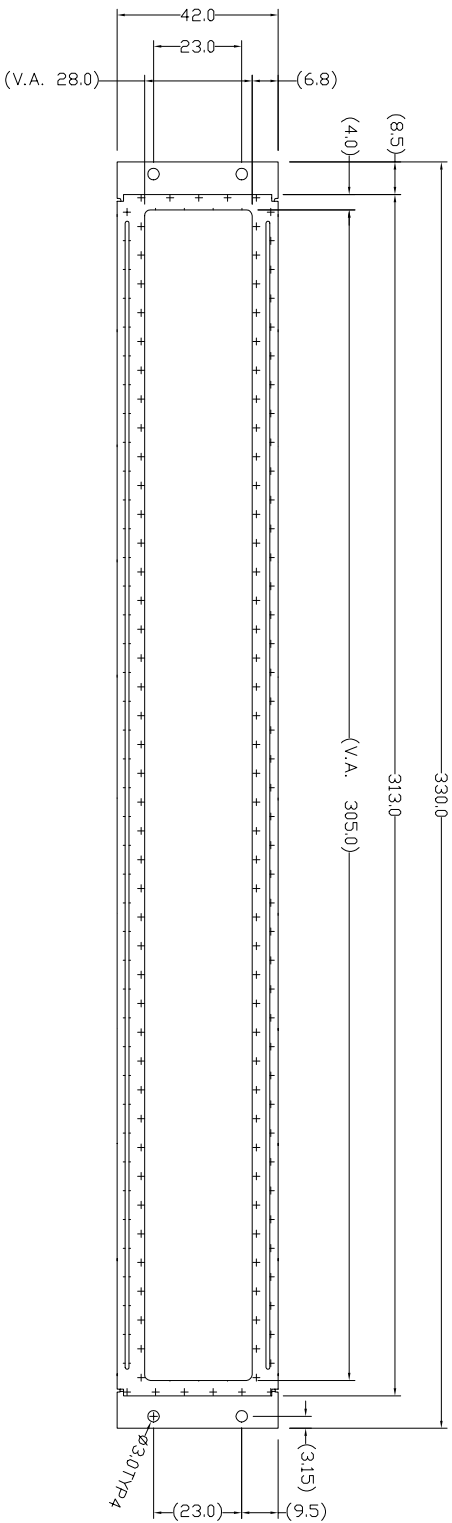

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VLCD	GND	VDD	M	DOFF	FLM	LP-C	LP-S	XCK	D0	D1	D2	D3	AD0	AD1	AD2


NOTES:

- 1 ◇ : SPECIAL CHARACTERISTIC
- 2 + : SAFETY CHARACTERISTIC
- 3 ▽ : CRITICAL DIMENSION
- 4 (.) : REFERENCE DIMENSION



VARRTRONIX LIMITED

ISSUE	AMENDMENT	DATE



Display Type	Graphic Display, Reflective, BCD, Blue & White
Display Resolution	352 x 32
Viewing Angle	All angle
Mix ratio and bias level	1/32, 1/7
Logic Voltage (V)	3V - 5V
LCD Driving Voltage	TBD
Operation Temperature	0°C to +40°C
Storage Temperature	-20°C to +70°C

TITLE: PRELIMINARY SPECIFICATION OF MODULE

PROJECT NO: BCD35232

TOLERANCE UNLESS OTHERWISE SPECIFIED:
 X.X ±0.3
 X.XX ±0.1
 ANGULAR: ±1°

MATERIAL: N/A FINISH: N/A
 SCALE: DID NOT IN SCALE OVERALL THK: N/A

THIRD ANGLE PROJECTION	NAME	SIGN	DATE
	CHAN KAM FAI		05.07.29

CHECKED: FUNG
 APPROVED: K.P.HO

ITEM NO.:

DESCRIPTION:

FILE NO.: D:/ BCD35232 REV: 1
 SHEET 1 OF 1