



**FEATURES:**

- RoHS compliant
- High efficiency up to 82%
- Low profile plastic package
- 7 pin SIP package
- Operating temperature -40°C to + 85°C
- 1 sec short circuit protection
- Pin compatible with multiple manufacturers

**Models**  
**Single output**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (Ma)	Isolation (VDC)	Efficiency (%)
AM1D-0505S-NZ	4.5-5.5	5	200	1000	72
AM1D-0509S-NZ	4.5-5.5	9	110	1000	74
AM1D-0512S-NZ	4.5-5.5	12	83	1000	77
AM1D-0515S-NZ	4.5-5.5	15	70	1000	79
AM1D-1205S-NZ	10.8-13.2	5	200	1000	73
AM1D-1209S-NZ	10.8-13.2	9	110	1000	75
AM1D-1212S-NZ	10.8-13.2	12	83	1000	79
AM1D-1215S-NZ	10.8-13.2	15	70	1000	80
AM1D-1505S-NZ	13.5-16.5	5	200	1000	72
AM1D-1509S-NZ	13.5-16.5	9	110	1000	73
AM1D-1512S-NZ	13.5-16.5	12	83	1000	74
AM1D-1515S-NZ	13.5-16.5	15	70	1000	75
AM1D-2405S-NZ	21.6-26.4	5	200	1000	74
AM1D-2409S-NZ	21.6-26.4	9	110	1000	76
AM1D-2412S-NZ	21.6-26.4	12	83	1000	80
AM1D-2415S-NZ	21.6-26.4	15	70	1000	81
AM1D-0505SH30-NZ	4.5-5.5	5	200	3000	70
AM1D-0509SH30-NZ	4.5-5.5	9	110	3000	75
AM1D-0512SH30-NZ	4.5-5.5	12	83	3000	78
AM1D-0515SH30-NZ	4.5-5.5	15	70	3000	80
AM1D-1205SH30-NZ	10.8-13.2	5	200	3000	72
AM1D-1209SH30-NZ	10.8-13.2	9	110	3000	76
AM1D-1212SH30-NZ	10.8-13.2	12	83	3000	79
AM1D-1215SH30-NZ	10.8-13.2	15	70	3000	81
AM1D-2405SH30-NZ	21.6-26.4	5	200	3000	73
AM1D-2409SH30-NZ	21.6-26.4	9	110	3000	77
AM1D-2412SH30-NZ	21.6-26.4	12	83	3000	80
AM1D-2415SH30-NZ	21.6-26.4	15	70	3000	82
AM1D-0505SH60-NZ	4.5-5.5	5	200	6000	72
AM1D-0509SH60-NZ	4.5-5.5	9	110	6000	72
AM1D-0512SH60-NZ	4.5-5.5	12	83	6000	75
AM1D-0515SH60-NZ	4.5-5.5	15	70	6000	75
AM1D-1205SH60-NZ	10.8-13.2	5	200	6000	75
AM1D-1209SH60-NZ	10.8-13.2	9	110	6000	76
AM1D-1212SH60-NZ	10.8-13.2	12	83	6000	78
AM1D-1215SH60-NZ	10.8-13.2	15	70	6000	78

**Models**  
**Dual output**

Model	Input Voltage (V)	Output Voltage (V)	Output Current (mA)	Isolation (VDC)	Efficiency (%)
AM1D-0505D-NZ	4.5-5.5	±5	±100	1000	72
AM1D-0509D-NZ	4.5-5.5	±9	±55	1000	75
AM1D-0512D-NZ	4.5-5.5	±12	±42	1000	78
AM1D-0515D-NZ	4.5-5.5	±15	±35	1000	79

## Models

### Dual output (continued)

Model	Input Voltage (V)	Output Voltage (V)	Output Current (mA)	Isolation (VDC)	Efficiency (%)
AM1D-1205D-NZ	10.8-13.2	±5	±100	1000	74
AM1D-1209D-NZ	10.8-13.2	±9	±55	1000	76
AM1D-1212D-NZ	10.8-13.2	±12	±42	1000	79
AM1D-1215D-NZ	10.8-13.2	±15	±35	1000	80
AM1D-2405D-NZ	21.6-26.4	±5	±100	1000	74
AM1D-2409D-NZ	21.6-26.4	±9	±55	1000	76
AM1D-2412D-NZ	21.6-26.4	±12	±42	1000	80
AM1D-2415D-NZ	21.6-26.4	±15	±35	1000	81
AM1D-0505DH30-NZ	4.5-5.5	±5	±100	3000	72
AM1D-0509DH30-NZ	4.5-5.5	±9	±55	3000	75
AM1D-0512DH30-NZ	4.5-5.5	±12	±42	3000	78
AM1D-0515DH30-NZ	4.5-5.5	±15	±35	3000	79
AM1D-1205DH30-NZ	10.8-13.2	±5	±100	3000	74
AM1D-1209DH30-NZ	10.8-13.2	±9	±55	3000	76
AM1D-1212DH30-NZ	10.8-13.2	±12	±42	3000	79
AM1D-1215DH30-NZ	10.8-13.2	±15	±35	3000	80
AM1D-2405DH30-NZ	21.6-26.4	±5	±100	3000	74
AM1D-2409DH30-NZ	21.6-26.4	±9	±55	3000	76
AM1D-2412DH30-NZ	21.6-26.4	±12	±42	3000	80
AM1D-2415DH30-NZ	21.6-26.4	±15	±35	3000	81
AM1D-0505DH60-NZ	4.5-5.5	±5	±100	6000	72
AM1D-0509DH60-NZ	4.5-5.5	±9	±55	6000	72
AM1D-0512DH60-NZ	4.5-5.5	±12	±42	6000	75
AM1D-0515DH60-NZ	4.5-5.5	±15	±35	6000	75
AM1D-1205DH60-NZ	10.8-13.2	±5	±100	6000	75
AM1D-1209DH60-NZ	10.8-13.2	±9	±55	6000	76
AM1D-1212DH60-NZ	10.8-13.2	±12	±42	6000	78
AM1D-1215DH60-NZ	10.8-13.2	±15	±35	6000	78

## Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	5	4.5-5.5		VDC
	12	10.8-13.2		
	15	13.5-16.5		
	24	21.6-26.4		
Filter	Capacitor			

## Isolation Specifications

Parameters	Conditions	Typical	Maximum	Units
Tested voltage	60 sec	1000, 3000 & 6000		VDC
Resistance		> 1000		MOhm
Capacitance		60		pF

## Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±5		%
Voltage balance	Dual Output	±1		%
Short Circuit protection	1 sec.			
Line voltage regulation (Single)	For 1.0% of Vin	±1.2		%
Line voltage regulation (Dual)	For 1.0% of Vin	±1.2		%
Load voltage regulation (Single)	load 10~100%	10		%
Load voltage regulation (Dual)	load 10~100%	10		%

### Output Specifications (continued)

Parameters	Conditions	Typical	Maximum	Units
Temperature coefficient		±0.03		%/°C
Ripple & Noise	At 20MHz Bandwidth	75		mV p-p

### General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	150		KHz
Case temperature			+95	°C
Operating temperature		-40 to +85		°C
Storage temperature		-55 to +125		°C
Derating	Non-Required			
Cooling	Free air convection			
Humidity	Non condensing		90	%
Case material	Plastic UL94-VO			
Weight		2		g
Dimensions	1000 & 3000VDC	0.76 x 0.24 x 0.39 inch		19.5 x 6.00 x 10.00 mm
	6000VDC	0.76 x 0.39 x 0.49 inch		19.50 x 9.80 x 12.5 mm
MTBF	>1 100 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C)			

### Safety Specifications

Standards	
Agency approvals	cULus (for 1000, 3000 & some 6000VDC Isolated models); CE (for 3000VDC Isolation models and single 1000VDC Isolation models)

### Pin Out Specifications

Pin	1000 VDC		3000 , 6000 VDC	
	Single	Dual	Single	Dual
1	+ V Input	+ V Input	+ V Input	+ V Input
2	- V Input	- V Input	- V Input	- V Input
4	- V Output	- V Output	No pin	No pin
5	No pin	Common	- V Output	- V Output
6	+ V Output	+ V Output	No pin	Common
7	No pin	No pin	+ V Output	+ V Output


### External capacitor – Single output

Vin (VDC)	External capacitor (µF)	Vout (VDC)	External capacitor (µF)
5	4.7	5	10
12	2.2	9	4.7
24	1	12	2.2
-	-	15	1


### External capacitor – Dual output

Vin (VDC)	External capacitor (µF)	Vout (VDC)	External capacitor (µF)
5	4.7	5	10
12	2.2	9	4.7
24	1	12	2.2
-	-	15	1


### Dimensions 1000 and 3000VDC

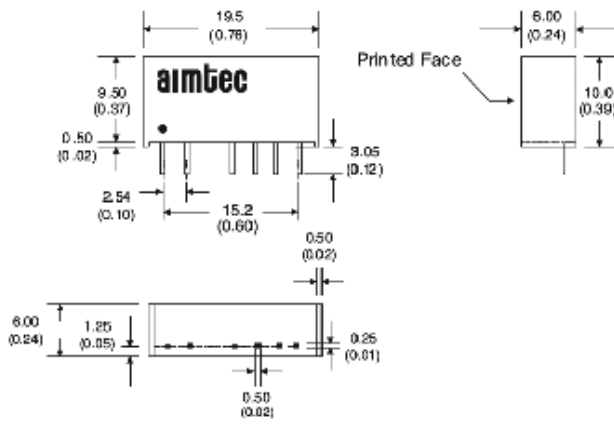


### Dimensions 6000VDC

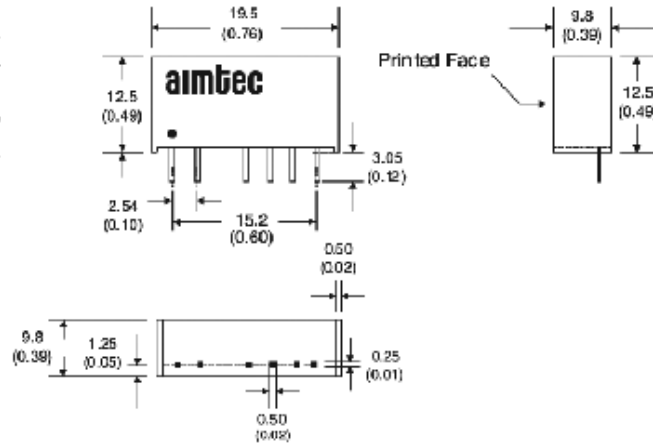

### Tolerance Envelope Graph

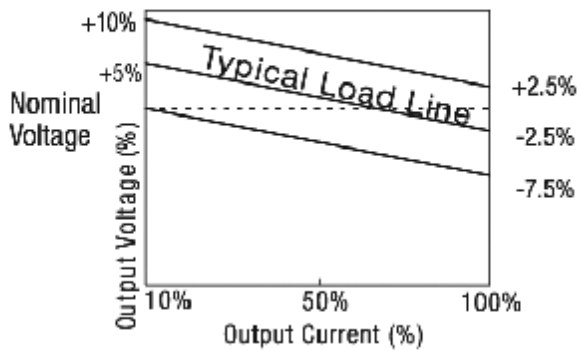

### Temperature Derating Graph

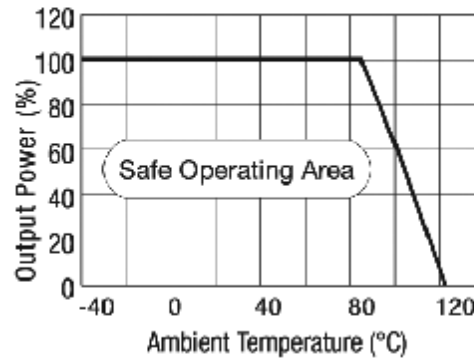

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 5. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet.