



FEATURES:

- RoHS compliant
- 4 Pin SIP Package
- Low ripple and noise
- High efficiency up to 72%
- Operating temperature -40°C to + 85°C
- Input / Output isolation 1000 and 3000VDC
- Pin compatible with multiple manufacturers

Models
Single output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Efficiency (%)
AM1/4S-0503SZ	4.5-5.5	3.3	75.7	1000	66
AM1/4S-0505SZ	4.5-5.5	5	50	1000	66
AM1/4S-0507SZ	4.5-5.5	7.2	34.72	1000	66
AM1/4S-0509SZ	4.5-5.5	9	27.77	1000	68
AM1/4S-0512SZ	4.5-5.5	12	20.83	1000	68
AM1/4S-0515SZ	4.5-5.5	15	16.67	1000	68
AM1/4S-0518SZ	4.5-5.5	18	13.88	1000	68
AM1/4S-0524SZ	4.5-5.5	24	10.41	1000	70
AM1/4S-1203SZ	10.8-13.2	3.3	75.7	1000	66
AM1/4S-1205SZ	10.8-13.2	5	50	1000	67
AM1/4S-1207SZ	10.8-13.2	7.2	34.72	1000	68
AM1/4S-1209SZ	10.8-13.2	9	27.77	1000	68
AM1/4S-1212SZ	10.8-13.2	12	20.83	1000	68
AM1/4S-1215SZ	10.8-13.2	15	16.67	1000	69
AM1/4S-1218SZ	10.8-13.2	18	13.88	1000	70
AM1/4S-1224SZ	10.8-13.2	24	10.41	1000	72
AM1/4S-2403SZ	21.6-26.4	3.3	75.7	1000	67
AM1/4S-2405SZ	21.6-26.4	5	50	1000	67
AM1/4S-2407SZ	21.6-26.4	7.2	34.72	1000	67
AM1/4S-2409SZ	21.6-26.4	9	27.77	1000	69
AM1/4S-2412SZ	21.6-26.4	12	20.83	1000	69
AM1/4S-2415SZ	21.6-26.4	15	16.67	1000	69
AM1/4S-2418SZ	21.6-26.4	18	13.88	1000	69
AM1/4S-2424SZ	21.6-26.4	24	10.41	1000	69
AM1/4S-0503SH30Z	4.5-5.5	3.3	75.7	3000	66
AM1/4S-0505SH30Z	4.5-5.5	5	50	3000	66
AM1/4S-0507SH30Z	4.5-5.5	7.2	34.72	3000	66
AM1/4S-0509SH30Z	4.5-5.5	9	27.77	3000	68
AM1/4S-0512SH30Z	4.5-5.5	12	20.83	3000	68
AM1/4S-0515SH30Z	4.5-5.5	15	16.67	3000	68
AM1/4S-0518SH30Z	4.5-5.5	18	13.88	3000	68
AM1/4S-0524SH30Z	4.5-5.5	24	10.41	3000	70
AM1/4S-1203SH30Z	10.8-13.2	3.3	75.7	3000	66
AM1/4S-1205SH30Z	10.8-13.2	5	50	3000	67
AM1/4S-1207SH30Z	10.8-13.2	7.2	34.72	3000	68
AM1/4S-1209SH30Z	10.8-13.2	9	27.77	3000	68
AM1/4S-1212SH30Z	10.8-13.2	12	20.83	3000	68
AM1/4S-1215SH30Z	10.8-13.2	15	16.67	3000	69
AM1/4S-1218SH30Z	10.8-13.2	18	13.88	3000	70
AM1/4S-1224SH30Z	10.8-13.2	24	10.41	3000	72
AM1/4S-2403SH30Z	21.6-26.4	3.3	75.7	3000	67
AM1/4S-2405SH30Z	21.6-26.4	5	50	3000	67
AM1/4S-2407SH30Z	21.6-26.4	7.2	34.72	3000	67
AM1/4S-2409SH30Z	21.6-26.4	9	27.77	3000	69
AM1/4S-2412SH30Z	21.6-26.4	12	20.83	3000	69
AM1/4S-2415SH30Z	21.6-26.4	15	16.67	3000	69
AM1/4S-2418SH30Z	21.6-26.4	18	13.88	3000	69
AM1/4S-2424SH30Z	21.6-26.4	24	10.41	3000	69

Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	5 12 24	4.5-5.5 10.8-13.2 21.6-26.4		VDC
Filter	Capacitor			
Turn on Transient process time			25	ms
Start up time		200		ms
Absolute Maximum Rating	5 Vin 12 Vin 24 Vin	7 15 28		VDC
Peak Input Voltage time		100		ms

Isolation Specifications

Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	3 sec	1000 and 3000		VDC
Resistance		> 1000		MOhm
Capacitance		60		pF

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±3		%
Short Circuit protection		Momentary (1sec)		
Line voltage regulation	For 1% change of Vin	±1.2		% of Vin
Load voltage regulation	Load 20 – 100%	±10		%
Load voltage regulation 3.3V output model	Load 20 – 100%	±20		%
Temperature coefficient		±0.02		%/°C
Ripple & Noise	At 20MHz Bandwidth	100		mV p-p
Capacitive load			100	µF
Rising time		50		ms


General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	80		KHz
Operating temperature	Without derating	-40 to +85		°C
Storage temperature		-40 to +125		°C
Max Case temperature			100	°C
Cooling		Free air convection		
Humidity			95	%
Case material		Non-conductive black plastic		
Weight		1.5		g
Dimensions (L x W x H)		0.46 x 0.24 x 0.38 inches	11.68 x 6.00 x 9.65 mm	
MTBF		>2 010 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C)		

NOTE: All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified

Pin Out Specifications

Pin	Single
1	- V Input
2	+V Input
3	- V Output
4	+V Output

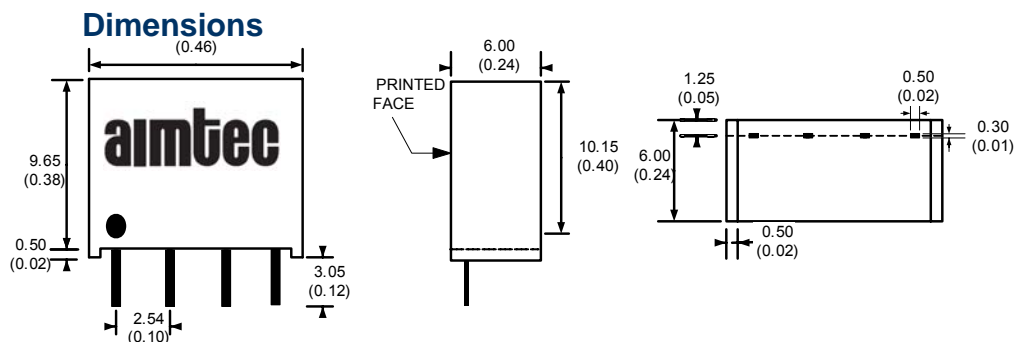

NOTE: **1.** Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **5.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet.