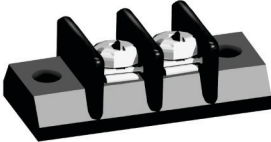







## TYPE:T56 ( 中継式端子台 )

Pitch:11.00mm

### ORDER GUIDE(注文方法):

# T56- S S11 - 02

Body(本体)	Terminal style(端子スタイル)	Poles(極数)
<p>S: 両端取付穴付 (with mounts)</p> 	<p>B63: </p> <p>S64: </p> <p>S11: </p> <p>TA0: </p> <p>S13: </p>	<p>02</p> <p>⋮</p> <p>⋮</p> <p>⋮</p> <p>⋮</p> <p>⋮</p> <p>⋮</p> <p>⋮</p> <p>⋮</p> <p>⋮</p> <p>24</p>

### SPECIFICATION(規格,仕様):

Terminal :	Brass, Gold plated,1.0 t	端子 :	黄銅板 金メッキ,1.0 t
Insulator body :	Phenolic,Black	主絶縁体 :	Phenolic , 黒色
Screw :	M3.0, steel, Ni plated	ネジ :	M3.0, 鉄ニッケルメッキ
Operation temperatures :	-40° C to +150° C	使用温度範囲 :	-40° C to + 150° C
Rated current :	20Amp AC250V	定格 :	20Amp AC250V
Insulation withstands volt :	AC2000V min	耐電圧 :	AC2000V 一分間
Insulation resistance :	>5000MΩ at DC 500V	絶縁抵抗 :	DC500V 5000MΩ以上
Wire range :	12~22 AWG	電線径 :	12~22 AWG
Screw torque :	9 lb-in	ネジ締付トルク :	9 lb-in
	Screw with washer		ワッシャー付ネジ



# .433" Barrier Terminal Blocks

TYPE:T56

Pitch:11.00mm



## T56-SB20-02

## Terminal style: B20

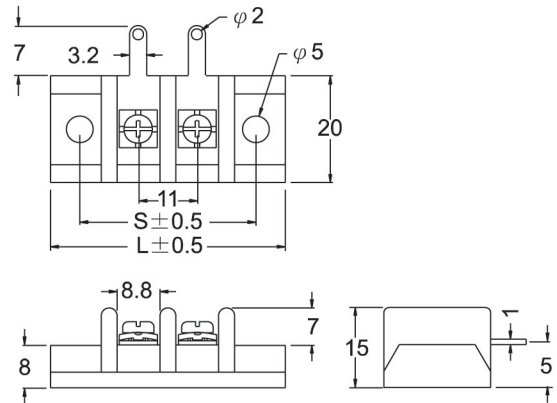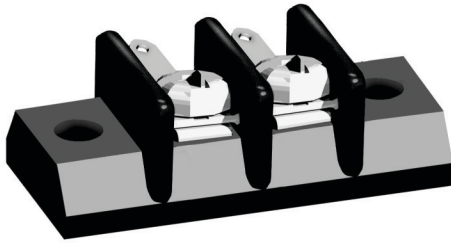



## T56-SS11-02

## Terminal style: S11

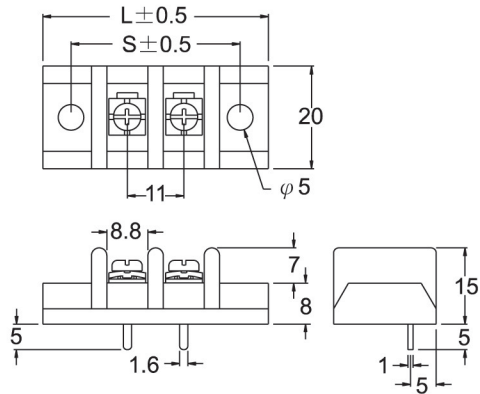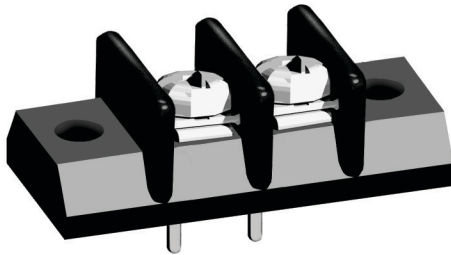

## T56-SS74-02

## Terminal style: S74

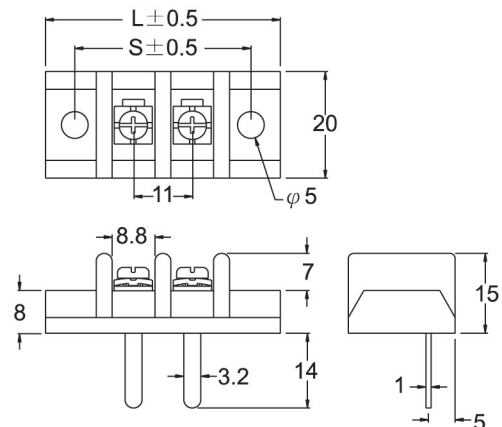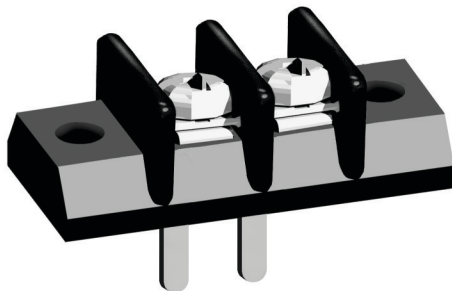

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L(mm)	46.1	57.1	68.1	79.1	90.1	101	112	123	134	145	156	167	178	189	200
S(mm)	33.0	44.0	55.0	66.0	77.0	88.0	99.0	110	121	132	143	154	165	176	187
Poles	17	18	19	20	21	22	23	24							
L(mm)	211	222	233	244	255	266	277	288							
S(mm)	198	209	220	231	242	253	264	275							



# .433" Barrier Terminal Blocks

TYPE:T56

Pitch:11.00mm



## T56-SS63-02

Terminal style: S63

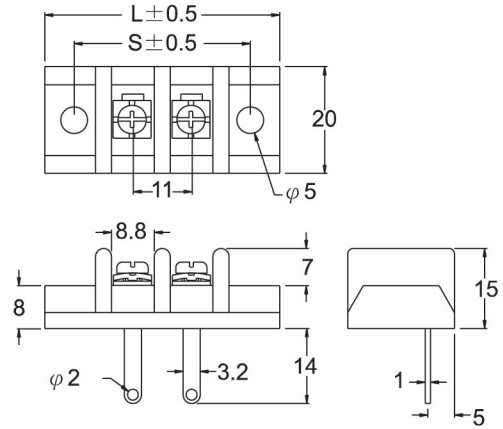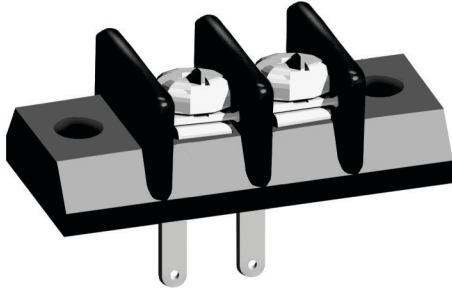

## T56-STA0-02

Terminal style: TA0

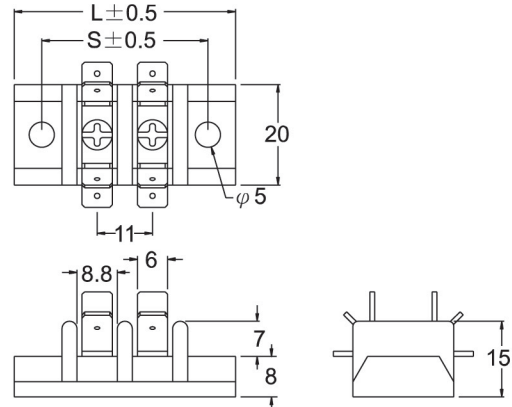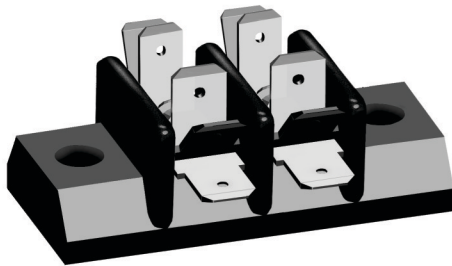

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L(mm)	46.1	57.1	68.1	79.1	90.1	101	112	123	134	145	156	167	178	189	200
S(mm)	33.0	44.0	55.0	66.0	77.0	88.0	99.0	110	121	132	143	154	165	176	187
Poles	17	18	19	20	21	22	23	24							
L(mm)	211	222	233	244	255	266	277	288							
S(mm)	198	209	220	231	242	253	264	275							