


NEW

TYPE:TED-339 (オーディオ用端子台)



Pitch:13.50mm

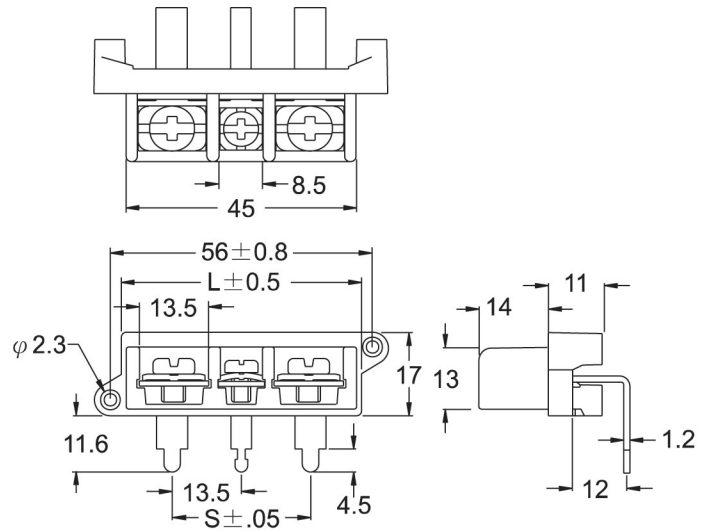

Poles	3																		
L(mm)	47.0																		
S(mm)	27.0																		

ORDER GUIDE(注文方法):

TE D - 3 39 - 03

Body(本体)	Terminal style(端子スタイル)	Poles(極数)
D-3: 標準型 (standard) 	39: 	3

SPECIFICATION(規格,仕様):

Terminal :	Brass, Gold plated, 1.2 t	端子 :	黄銅板 金メッキ, 1.2 t
Insulator body :	PBT(UL94V-0), Black	主絶縁体 :	PBT(UL94V-0), 黒色
Screw :	M4/M5, steel, Ni plated	ネジ :	M3.5/M4鉄ニッケルメッキ
Operation temperatures :	-40° C to +85° C	使用温度範囲 :	-40° C to +85° C
Rated current :	30Amp/40Amp DC 24V	定格 :	30Amp/40Amp DC 24V
Insulation withstands volt :	AC1500V min	耐電圧 :	AC1500V 一分間
Insulation resistance :	>5000MΩ at DC 500V	絶縁抵抗 :	DC500V 5000MΩ以上
Wire range :	14~22 AWG	電線径 :	14~22 AWG
Screw torque :	18 lb-in	ネジ締付トルク :	18 lb-in
	Screw with washer		ワッシャー付ネジ