
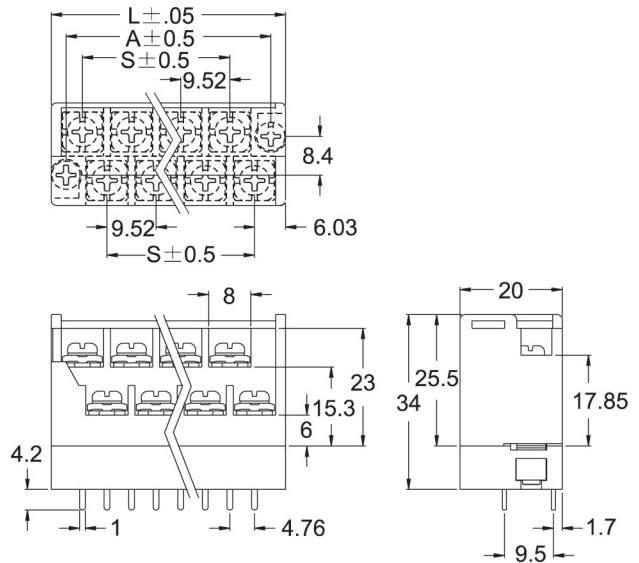


TYPE:TS4-2241 (貫通式端子台)

Pitch:9.52mm

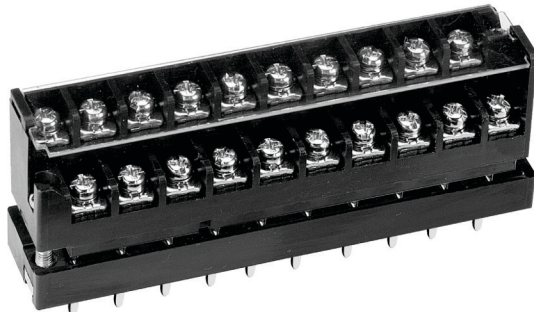

Poles	10	12	13	15	18								
A(mm)	96.5	116	125	144	173								
L(mm)	103	122	131	150	179								
S(mm)	85.7	105	114	133	162								

ORDER GUIDE(注文方法):

TS4 - 22 41 - 10

Body(本体) 22:標準型 (standard) 	Terminal style(端子スタイル) 41:	Poles(極数) 10 12 13 15 18
--	--------------------------------------	--

SPECIFICATION(規格,仕様):

Terminal :	Brass, Tin plated,0.8 t	端子 :	黄銅板ハンダメッキ,0.8 t
Insulator body :	PBT(UL94V-0), Black	主絶縁体 :	PBT(UL94V-0), 黒色
Screw :	M3.5, steel, Ni plated	ネジ :	M3.5, 鉄ニッケルメッキ
Cover :	PC	カバー :	PC
Operation temperatures :	-40° C to +120° C	使用温度範囲 :	-40° C to +120° C
Rated current :	20Amp AC300V	定格 :	20Amp AC300V
Insulation withstands volt :	AC2000V min	耐電圧 :	AC2000V 一分間
Insulation resistance :	>5000MΩ at DC 500V	絶縁抵抗 :	DC500V 5000MΩ以上
PCB hole Dia :	φ 1.3mm	基板穴径 :	φ 1.3mm
Wire range :	14~22 AWG	電線径 :	14~22 AWG
Screw torque :	15 lb-in Screw with washer	ネジ締付トルク :	15 lb-in ワッシャー付ネジ