

SPECIFICATION


Electric
 Current Rating: 5 Amp
 Dielectric Strength: 1000V/ Minute.
 Insulator Resistance: 1000M ohm Min.
 At 500V DC
 Temperature: -55°C ~+105°C

Material

Stell: Zinc Plated Or Tin plated
 Pin Contact: Brass, Gold Plated Over Nickel
 Insulator: PBT&Glass-Fiber Reinforced
 , UL94V-0

POLES	A	B	C	D
9F	16.33	24.99	30.81	19.28
15F	24.66	33.32	39.14	27.51
25F	38.38	47.04	53.04	41.30
37F	54.84	63.50	69.32	57.71
50F	52.34	61.11	66.92	55.30

Accessories

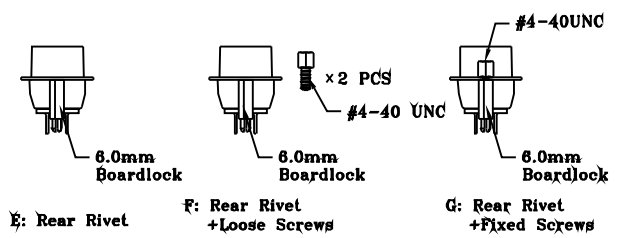

ORDER INFORMATION

Contact No.	Contact Type	Mounting Option	Accessories	Shell Plating	Contact Plating	Others
C0541- <input type="text" value="09"/>	<input type="text" value="F"/>	<input type="text" value="I"/>	<input type="text" value="E"/>	<input type="text" value="T"/>	<input type="text" value="S"/>	<input type="text" value="W"/>
09 16 25 37 50	F: Female	I: 6.0mm Boardlock Rivet	E: Rear Rivet F: Rear Rivet + Loose Screws G: Rear Rivet + Fixed Screws	T: Tin N: Nickel Z: Zinc(Chrome)lc	S: Selective Gold G: Gold Flash A: Gold 5u" B: Gold 10u" C: Gold 15u" D: Gold 30u"	B: Black Insulator W: White Insulator L: Blue Insulator G: Grey Insulator

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT	SCALE	PART NAME	
MM	2:1	D-SUB P.C.B. STRAIGHT (FEMALE) 6.0mm Boardlock Rivet	
APPD.	CKD.	TOLERANCE	PART NO.
		± 0.5	C0541-XXFIXXXX
APPROVED		REV.	A

制表日: 2000/06/07

DRAWING.
Jane