

**SPECIFICATION**


Electric  
 Current Rating: 5 Amp  
 Dielectric Strength: 1000V/ Minute.  
 Insulator Resistance: 1000M ohm Min.  
 At 500V DC  
 Temperature: -55°C ~+105°C

**Material**

Stell: Zinc Plated Or Tin plated  
 Pin Contact: Brass, Gold Plated Over Nickel  
 Insulator: PBT&Glass-Fiber Reinforced  
 , UL94V-0

POLES	A	B	C	D
9M	16.92	24.99	30.81	19.28
15M	25.25	33.32	39.14	27.51
25M	38.96	47.04	53.04	41.30
37M	55.42	63.50	69.32	57.71
50M	52.86	61.11	66.92	55.30

**Accessories**

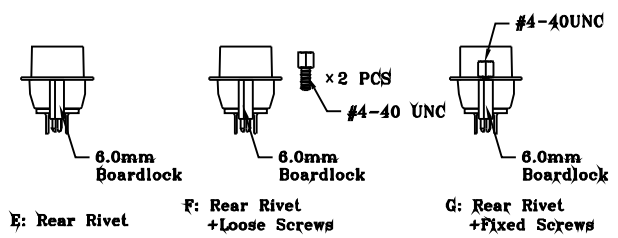

**ORDER INFORMATION**

Contact No.	Contact Type	Mounting Option	Accessories	Shell Plating	Contact Plating	Others
C0541- <input type="text" value="09"/>	<input type="text" value="M"/>	<input type="text" value="I"/>	<input type="text" value="E"/>	<input type="text" value="A"/>	<input type="text" value="S"/>	<input type="text" value="W"/>
09 15 25 37 50	M: Male	I: 6.0mm Boardlock Rivet	E: Rear Rivet F: Rear Rivet + Loose Screws G: Rear Rivet + Fixed Screws	A: Tin+Dimple B: Nickel+Dimple Z: Zinc(Chromate)	S: Selective Gold G: Gold Flash A: Gold 5u" B: Gold 10u" C: Gold 15u" D: Gold 30u"	B: Black Insulator W: White Insulator L: Blue Insulator G: Grey Insulator

**玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

UNIT	SCALE	PART NAME	
MM	2:1	D-SUB P.C.B. STRAIGHT (MALE) 6.0mm Boardlock Rivet	
APPD.	CKD.	TOLERANCE	PART NO.
		± 0.5	C0541-XXMIXXXX
APPROVED	REV.		A

制表日: 2000/06/07

DRAWING.  
Jane

APPROVED