



D-SUB HIGH DENSITY P.C.B. STRAIGHT TYPE (FEMALE)

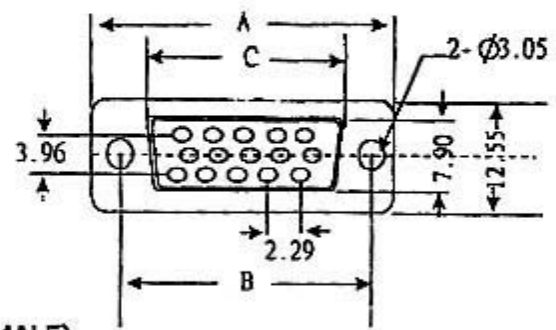

D-SUB HIGH DENSITY P.C.B. STRAIGHT TYPE (FEMALE)

Electrical characteristics:
 Current Rating: 5 Amperes
 Withstanding Voltage :AC 1000V OMS.
 Insulation resistance:
 5000 Megohms minimum at DC 500V.
 Contact Resistance:
 15 Milliohms Maximum.
 Operation Temperature: -55°C~105°C.
 Mechanical characteristics:
 Contact insertion force:34.1g.maximum.
 Contact RepARATION force:20g.minimum
 Materials:
 Contacts:phosphor bronze
 Housing:PBT
 Shell: Gold Roller Steel.
 Finish:Contact:Gold finish 10,15,30,50U"
 Shell:nickel plated,Tin plated,Zinc plated.

HIGHT DENSITY P.C.B. STRAIGHT FEMALE

| | CONTACT A±0.38 | B±0.13 | C±0.13 | D±0.13 |
|-----|----------------|--------|--------|--------|
| 15F | 30.81 | 24.99 | 16.33 | 18.35 |
| 26F | 39.14 | 33.32 | 24.66 | 26.80 |
| 44F | 53.04 | 47.04 | 38.40 | 40.30 |
| 62F | 69.32 | 63.50 | 54.84 | 56.60 |

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

| | | |
|----------------|-------------|----------|
| 制表日:2004/04/01 | DRAWING. | APPROVED |
| | <i>judy</i> | |

| UNIT | | SCALE | PART NAME | |
|-------|------|-----------|---|------|
| MM | | 2:1 | DHDPS-44FAATG1-1 HIGH DENSITY D-SUB PCB 180° | |
| APPD. | CKD. | TOLERANCE | PART NO. | REV. |
| | | ± 0.2 | C0561-XXFAATGB | A |