



1 2 3 4 5 6 7 8

A


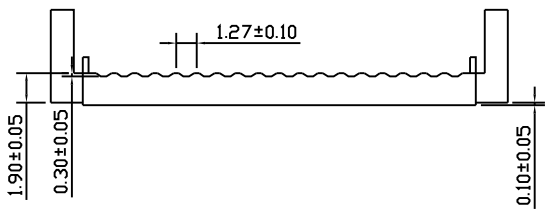


PITCH 2.54MMx7.62MM I.D.C. DIP PLUG FOR PITCH 1.27MM CENTER FLAT RIBBON CABLE

MATERIAL & FINISH:
 *INSULATOR:PBT+GLASS FIBER UL 94V-0
 *CONTACT:BRASS
 *FINISH:GOLD-PLATED OVER NICKEL



SPECIFICATIONS:
 *CURRENT RATING:1A AC,DC
 *VOLTAGE RATING:250V AC,DC
 *TEMPERATURE RANGE:-40? TO +105?
 *CONTACT RESISTANCE:20MΩ MAX
 *INSULATION RESISTANCE:1,000MΩ MIN
 *WITHSTANDING VOLTAGE:500V AC/MIN

B

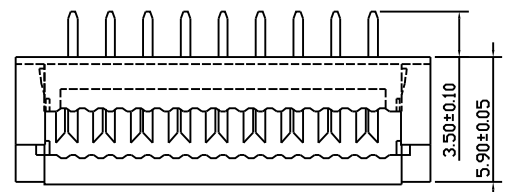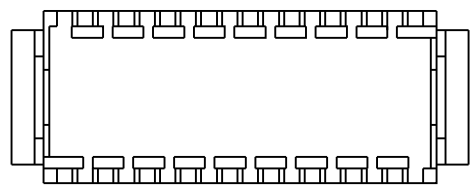



C

D

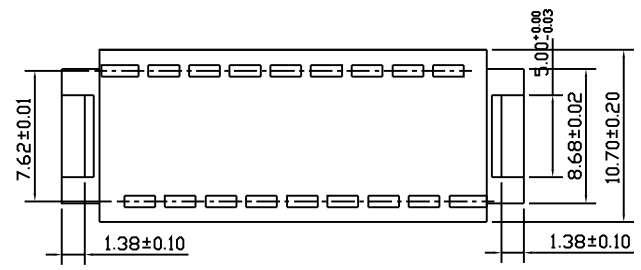

E

F

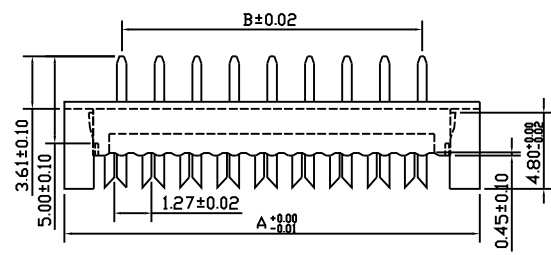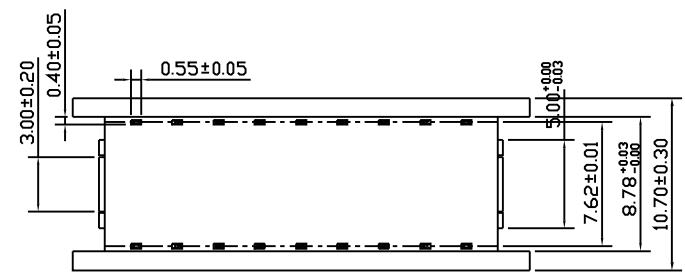

G

PART NO.	DIMENSIONS(MM)	
	A	B
3200-8P	7.62	15.42
3200-10P	10.16	17.96
3200-14P	15.24	23.04
3200-16P	17.78	25.58
3200-18P	20.32	28.12
3200-20P	22.86	30.66

PART NO.	DIMENSIONS(MM)	
	A	B
3200-24P	27.94	35.74
3200-26P	30.48	38.28
3200-28P	33.02	40.82
3200-34P	40.64	48.44
3200-40P	48.26	56.06

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE		PART NAME	
MM		2 : 1		2.54x7.62MM DIP PLUG	
APPD.	CKD.	TOLERANCE	PART NO.		REV.
		± 0.5	C3200-XXXX0000		

制表日：2000/08/21

DRAWING. TINA
 APPROVED SHELLEY

1 2 3 4 5 6 7 8