

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C






D

E

F

G

H

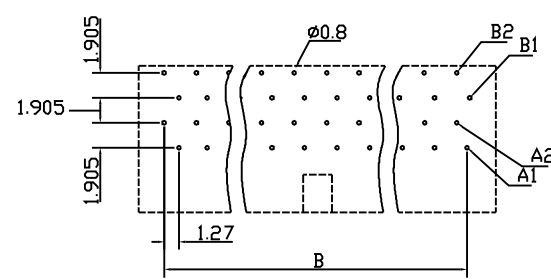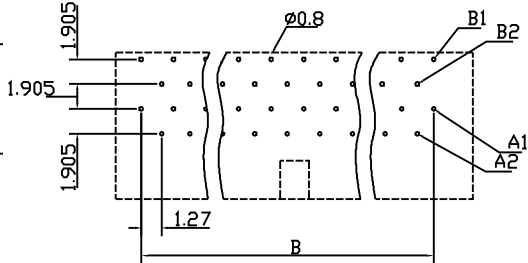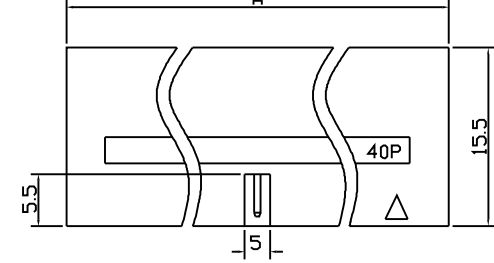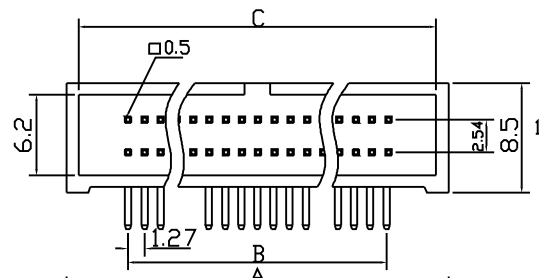

P.C. Board Layout Top View
(26,34,50 Position)

P.C. Board Layout Top View
(20,32,40,52,60,68,80,100 Position)

Position	DIMENSION		
	A	B	C
20	20.95	11.43	18.75
26	24.76	15.24	22.56
32	28.57	19.05	26.37
34	29.84	20.32	27.64
40	33.65	24.13	31.45
50	40.00	30.48	37.80
52	41.27	31.75	39.07
60	46.35	36.83	44.15
68	51.43	41.91	49.23
80	59.05	49.53	56.85
100	71.75	62.23	69.55

Features:
 *Right Angle type.
 *Fully shrouded offers excellent protection.
 *4 row 1.27mm(0.05") zigzag PCB Layout.
 *Choices of 20,26,32,34,40,50,52,60,68, 80,100 pin.
 Material:
 Housing: 30%Glass filled PBT UL94V-0
 Contacts: Brass.
 Plating: Gold plated over nickel.
 Tin plated over nickel.
 Selective gold plated: Gold plated on mating area and tin plated on solder tail.
 Electrical Characteristics:
 Current Rating: 0.5AMP.
 Insulator Resistance: 5000MΩ min. at DC 500V.
 Contact Resistance: 20MΩ max. at DC 100mA.
 Operating Temperature: -55?~+105?.

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		2:1	1.27x2.54mm BOX HEADER 90°	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.5	C3502-XXRXB000	A

制表日: 2002/12/04
 DRAWING. Jane
 APPROVED

1 2 3 4 5 6 7 8