



P.C. Board Layout Top View
(26,34,50 Position)

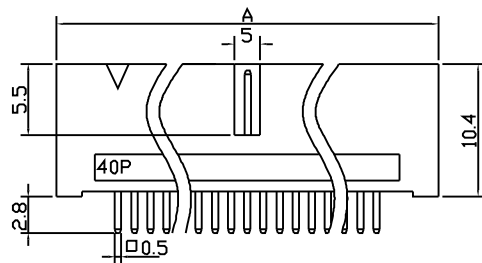

P.C. Board Layout Top View
(20,32,40,52,60,68,80,100 Position)



Position	DIMENSION		
	A	B	C
20	20.95	11.43	18.75
26	24.76	15.24	22.56
32	28.57	19.05	26.37
34	29.84	20.32	27.64
40	33.65	24.13	31.45
50	40.00	30.48	37.80
52	41.27	31.75	39.07
60	46.35	36.83	44.15
68	51.43	41.91	49.23
80	59.05	49.53	56.85
100	71.75	62.23	69.55

Features:

- *Straight type.
- *Fully shrouded offers excellent protection.
- *4 row 1.27mm(0.05") zigzag PCB Layout.
- *Choices of 20,26,32,34,40,50,52,60,68, 80,100 pin.

Material:

Housing: 30%Glass filled PBT UL94V-0

Contacts: Brass.

Plating: Gold plated over nickel.

Tin plated over nickel.

Selective gold plated: Gold plated on mating area and tin plated on solder tail.

Electrical Characteristics:

Current Rating: 0.5AMP.

Insulator Resistance: 5000MΩ min. at DC 500V.

Contact Resistance: 20MΩ max. at DC 100mA.

Operating Temperature: -55°~+105°

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

制表日: 2002/12/04

DRAWING.

Jane

APPROVED

APPD.

CKD.

TOLERANCE

± 0.5

PART NO.

C3502-XXSXB000

REV.

A