



P.C.B. LAYOUT

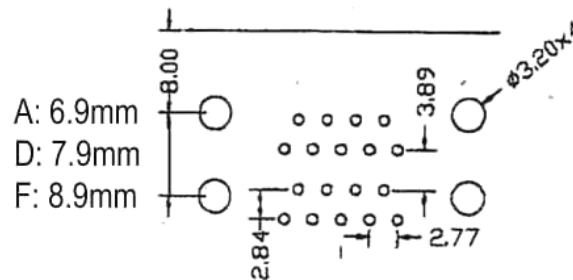

A: 6.9mm
D: 7.9mm
F: 8.9mm

ORDER INFORMATION

Contact No.	Contact Type	Mounting Option	Accessories	Part Spacing	Contact Plating	Others
C0553 — 09	A	A	B	A	S	B
09: 09/09	A: M/M	A: Dual Boardlock (Centerline 6.9mm) D: Dual Boardlock (Centerline 7.9mm) F: Dual Boardlock (Centerline 8.9mm)	B: Add Screw(4.8*11.8) D: Add Screw(5.8*12.0)	A: 15.875mm B: 19.05mm C: 22.86mm	S: Selective Gold G: Gold Flash A: Gold 5u" B: Gold 10u" C: Gold 15u" D: Gold 30u"	B: Black P: Pink

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

1.5 : 1

D-SUB 90° DUAL PORT
DUAL BOARDLOCK 9M/9M

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日: 2002/12/04

DRAWING.

APPROVED

± 0.3

C0553-09AXXXXX

A

Jane