




DDOT SIZE FOR CUSTOMER REFERENCE

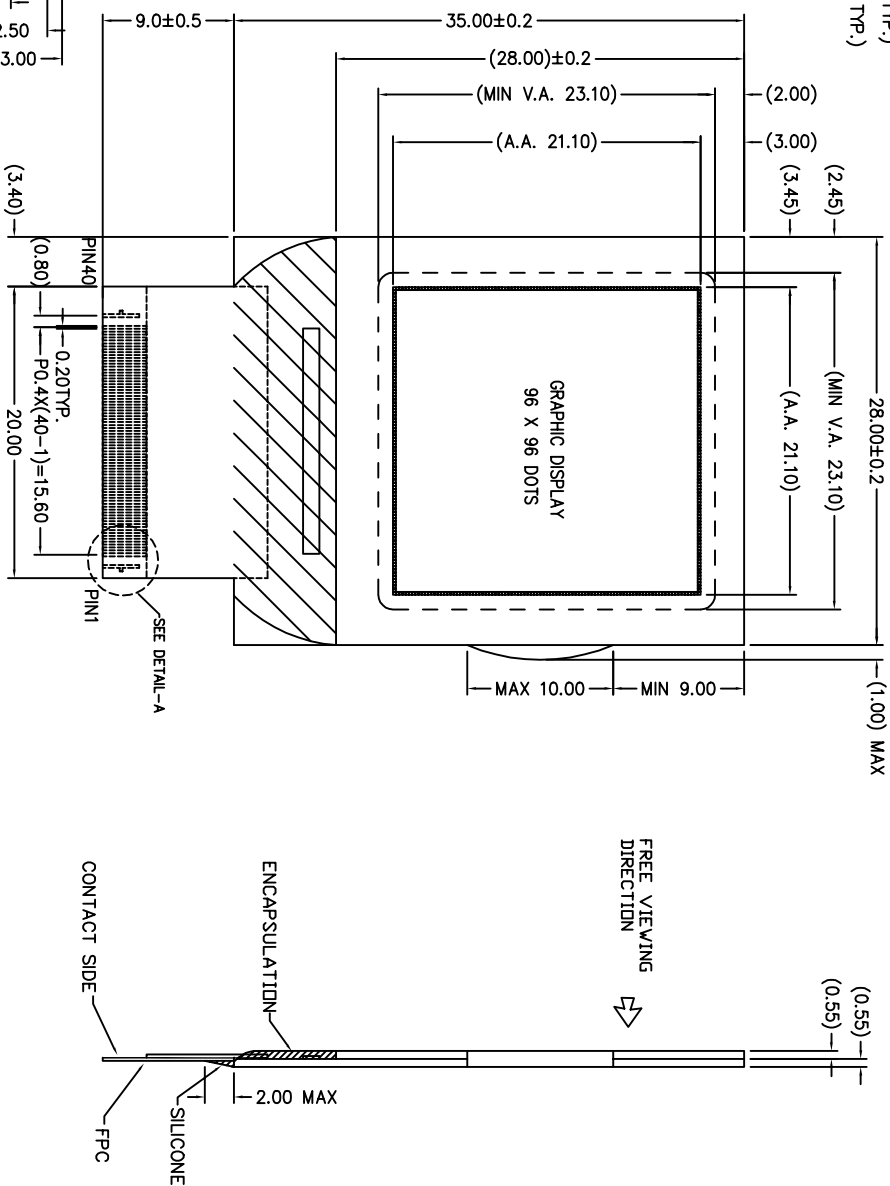

1	2	3	4	5	6	7	8	9	10
NC	NC	NC	NC	NC	NC	V0R	V1R	V2R	V3R
11	12	13	14	15	16	17	18	19	20
V4R	V5R	D17	D16	D15	D14	D13	D12	D11	D10
21	22	23	24	25	26	27	28	29	30
VSS	VDD	FP	LP	FR	XCK	MD	DISPROF	V5L	V4L
31	32	33	34	35	36	37	38	39	40
V3L	V2L	V1L	V0L	NC	NC	NC	NC	NC	NC

- NOTES:
- 1 ◊ : SPECIAL CHARACTERISTIC
 - 2 + : SAFETY CHARACTERISTIC
 - 3 ▽ : CRITICAL DIMENSION
 - 4 (.) : REFERENCE DIMENSION



VARRITRONIX LIMITED

ISSUE	AMENDMENT	DATE

Display Type	BCD, REFLECTIVE
Display Resolution	96 X 96 Dots
Viewing Angle	ALL ANGLE
Max ratio and bias level	BCD DRIVING SCHEME
LCD Controller/Driver	SPLD804A
Logic Voltage	3V
LCD Driving Voltage	TBD
Operation Temperature	0 °C to +50°C
Storage Temperature	-20°C to +60°C

TITLE: PRELIMINARY SPECIFICATION OF MODULE

PROJECT NO.: BCD9696

TOLERANCE UNLESS OTHERWISE SPECIFIED:	X.X ±0.3
DIMENSIONS IN MM	XXX ±0.1
ANGULAR ±1°	

MATERIAL: N/A	FINISH: N/A
SCALE: DID NOT IN SCALE	OVERALL THK: N/A

THIRD ANGLE PROJECTION	NAME	SIGN	DATE
DRAWN:	CHAN KAM FAI		05.11.03
CHECKED:			
APPROVED:			

ITEM NO.: BCD9696-01
 DESCRIPTION: BCD9696
 FILE NO.: BCD9696
 SHEET 1 OF 1