

# **Introducing**Inverted SMT Thru Board Connector



# Inverted SMT Thru Board Connector



#### **KEY FEATURES**

- Available in 2 through 6 positions
- Eliminates wire dress management issues with discreet wire leads around the surface of the LED pc board
- Accepts 2 thru 6 Position
   TE Mini CT Connector
- Low profile design
- Rounded corners to minimize shadowing
- Connector is positioned through cutout or notch in pc board
- Surface mount hold downs provide stability during mating and unmating
- High temperature material for reflow processing
- Flat top surface allows for vacuum pick up
- Tape and reel packaging for high speed SMT processing
- Mini CT Cable Assemblies are available in customer specified lengths upon special request
- Selectively loaded Inverted SMT Thru Board Connectors available upon special request

## **DESCRIPTIONS**

The Inverted SMT Thru Board Connector provides a means to bring power to LED aluminum clad and FR4 boards from the underside of the pc board.

## **APPLICATIONS**

LED lighting controls

Indoor and outdoor lighting fixtures

General LED illumination fixtures

Various non-lighting applications that require wire dress connections below the pc board

#### **ELECTRICAL**

Operating Voltage: 50VAC / 50VDC

Operating Current:

#24 AWG - 3A

#26 AWG - 2.5A

#28 AWG - 1.5A

#### **MATERIALS**

Housing: 94 VO rated high temperature resistant thermoplastic

Contacts: Tin over nickel plated copper alloy

## STANDARDS AND SPECS

108-2376: Inverted SMT Thru Board Product Specification

114-13245: Inverted SMT Thru Board Application Specification

108-60025: Mini CT Connector Product Specification

114-5245: Mini CT Connector Application Specification

UL 1977 File No. E28476

#### **MECHANICAL**


Operating Temperature: -40°C to +105°C



# **PRODUCT OFFERING**

Connector P/N	Position	"A" DIM	"B" DIM	"C" DIM	"D" DIM	Mini CT Cable Assy P/N 158.8 mm [6.25] long
2106091-1	2	5.5 [.216]	9.11 [.359]	6.00 [.236]	4.10 [.161]	2058943-1
2106091-2	3	7.00 [.275]	10.61 [.418]	7.50 [.295]	4.85 [.191]	2058943-2
2106091-3	4	8.50 [.335]	12.11 [.477]	9.00 [.354]	5.60 [.220]	2058943-3
2106091-4	5	10.00 [.394]	13.61 [.536 ]	10.50 [.413]	6.35 [.250]	2058943-4
2106091-5	6	11.50 [.453]	15.11 [.595]	12.00 [.472]	7.10 [.280]	2058943-5

### **Even Position PCB Layout**

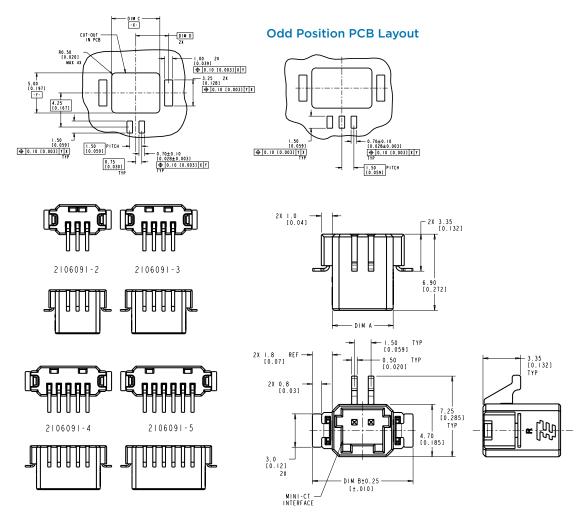

#### FOR MORE INFORMATION

www.tvcoelectronics.com/lighting

#### **Technical Support**

Internet: www.tycoelectronics.com/help

USA: +1 (800) 522-6752
Canada: +1 (905) 470-4425
Mexico & Central America: +52(0) 55-1106-0814
South America: +55 (0) 11-2103-6000
Germany: +49 (0) 6251-133-1999
UK: +44 (0) 8706-080208
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Part numbers in this brochure are RoHS Compliant\*, unless marked otherwise. \*as defined www.tycoelectronics.com/leadfree

#### **Tyco Electronics Corporation**

Harrisburg, PA

#### tycoelectronics.com

@ 2009 Tyco Electronics Corporation. All Rights Reserved. 7-1773453-0  $\,$  3M  $\,$  FP  $\,$  01/2010  $\,$ 

TE (logo) and Tyco Electronics are trademarks of the Tyco Electronics group of companies and its licensors. Other products, logos, and Company names mentioned herein may be trademarks of their respective owners.

