



MATERIAL AND FINISHES:
 BODY: BRASS, TRI-M3
 CENTER CONTACT(PIN AND SOCKET):
 PHOSPHOR BRONZE SILVER PLATING
 INSULATOR: TEFLON
 GASKET: SILICONE RUBBER
 DUST CAPS: PE

<600V@1KV/PS
 WORKING TEMPERATURE RANGE:
 -40°C~+85°C
 RoHS: COMPLIANT WITH RoHS
 WATER-PROOF: IP67,IEC 529
 PACKING: EACH ONE MUST HAVE 2 CAPS




ASSEMBLY PROVIDES SURGE PROTECTION
 FROM BOTH DIRECTIONS



PERFORMANCE REQUIREMENTS:
 FREQUENCY RANGE: 0-2500MHZ
 IMPEDANCE: 50 Ohm
 V.S.W.R: ≤ 1.15
 INSERTION LOSS: ≤ 0.2dB
 DC SPARK-OVER VOLTAGE:
 90V ±25%@100V/S
 NORMINAL IMPULSE DISCHARGE CURRENT:
 10KA@8/20μS WAVE
 MAXIMUM IMPULSE SPARK-OVER VOLTAGE:

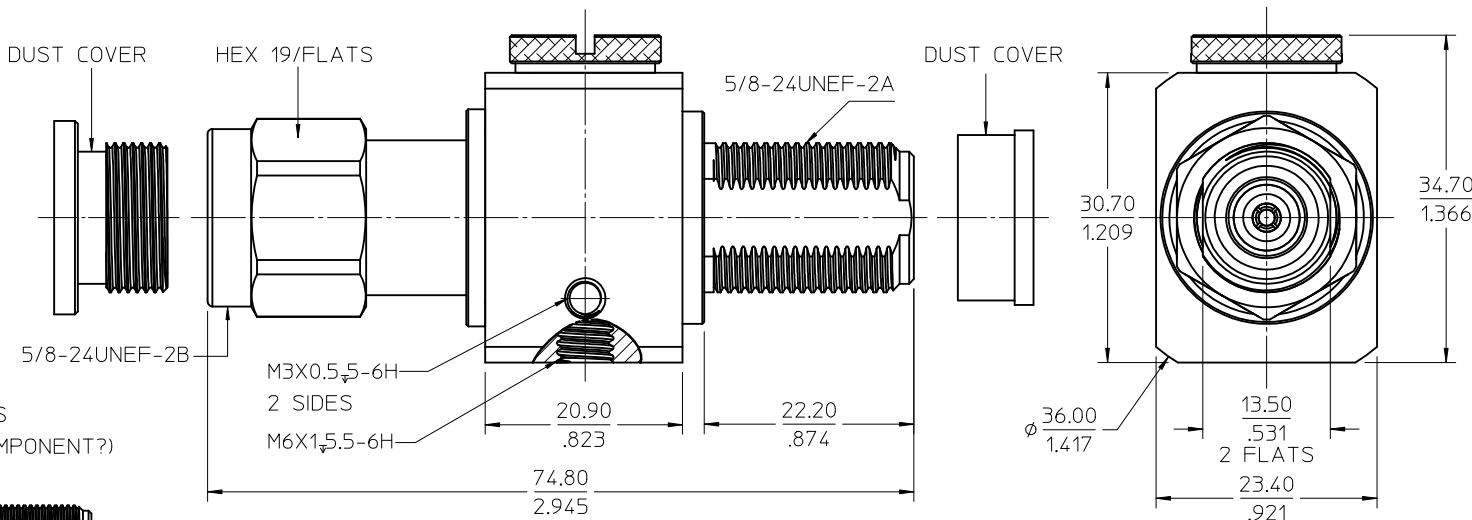

RECOMMENDED INSTRUCTIONS
 (HOW TO REPLACE THE GAS TUBE COMPONENT?)

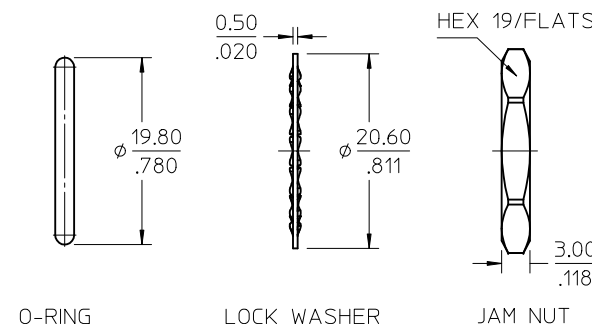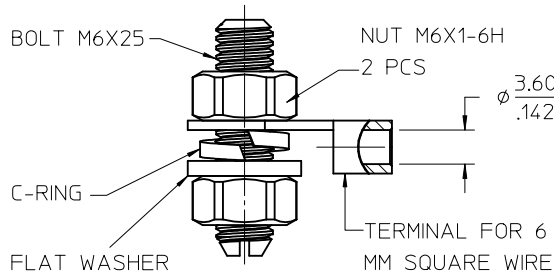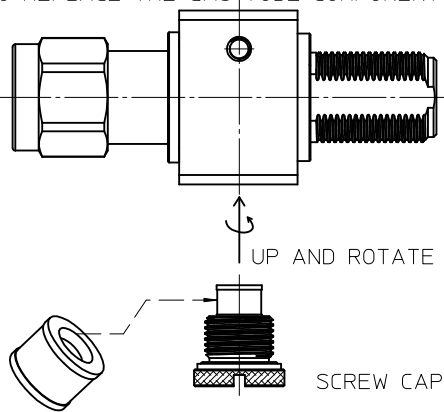

IEC61643-21	LIGHTNING PROTECTION
IEC60169-16	INTERFACE
SPECIFICATION	DESCRIPTION

PART # 73136-0060
 OLD TEAN NO.: TA2.908.078A

CHG:ADD ϕ 19.80 AND ϕ 20.60 PER PDR NO: 20110517 EC NO:UBR7201106680 DRWN:CZHU03 CHKD: SRZHAO APPR:SRZHAO	DESCRIPTION 2011/05/19	QUALITY SYMBOLS $\nabla=0$ $\nabla=0$	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES \pm --- \pm --- 3 PLACES \pm --- \pm --- 2 PLACES \pm --- \pm --- 1 PLACE \pm --- \pm --- ANGULAR \pm 2 °	DIMENSION STYLE MM/IN	SCALE DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		DRAWN BY CZHU03	DATE 2011/04/26	TITLE ARRESTER GDT NMNF BH 0-2.5GHZ 90V10KA		
		CHECKED BY MANDY XU	DATE 2011/04/26	APPROVED BY SRZHAO	DATE 2011/05/10	
		MATERIAL NO. 731360060	DOCUMENT NO. SD-73136-006	SHEET NO. 1 OF 1		

DRAFT WHERE APPLICABLE
 MUST REMAIN
 WITHIN DIMENSIONS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
 INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION