

NOTE:

1.ALL DIMENSIONS ARE IN MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.

2.GENERAL TOLERANCES $\pm 0.25\text{mm}$

3.MECHANICAL:

Operating Force(OF): $160 \pm 50\text{gf}$

Life: $160\text{g} \pm 50\text{g}$, 300,000 CYCLES

4.ELECTRIAL:



Switch Rating: 50 mA, 12V DC

Contact Resistance: 100 m Ω Max

Insulation Resistance: 500V DC, 100 M Ω Min

LED Operating Current: 20mA Max.

P.C.B LAYOUT

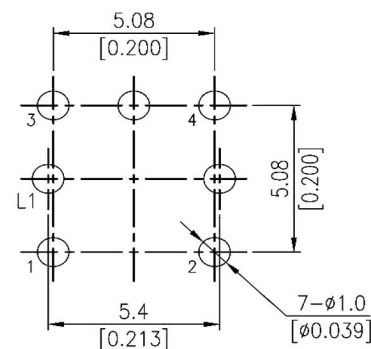

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty		TOLERANCE 容許公差 .0 \pm 0.30 .00 \pm 0.20 ANG. \pm 3°	PART NAME 品名 Illuminated Switch With Cap Through Hole Type Operating Force:160gf Cap Color:Silver ROHS
DWG. 製圖 Betty	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 C8902-BVX00000R
DATE 制表日 2013/08/26	PAGE 張數 1 OF 1	SIZE 紙張尺寸 A 4 REV. 版次 A	