

Features:

- 4 ~ 24 circuits available
- Plastic Material: LCP
- Pin material: Phosphor bronze
Tin-plated



Specification:

- Voltage rating: 250V AC(RMS) or DC
- Current rating: 5A AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)

Circuits	N
Dim. A	3 x (N / 2 - 1)
Dim. B	3 x (N / 2) + 6

&& N = 4 ~ 24

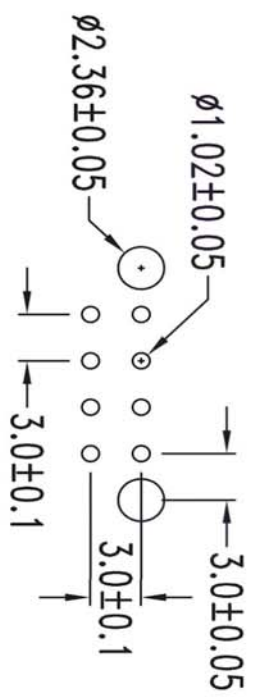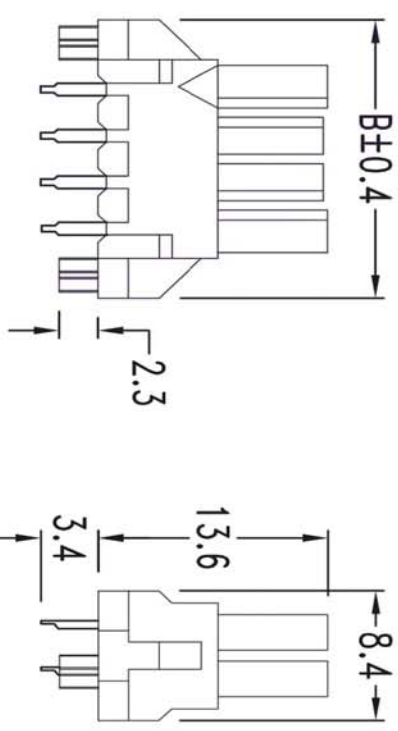

PCB Layout: Component side
Recommended PCB thickness: .062" (1.57mm)

RoHS Compliant

HSM 宏茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPRO. 核准	Betty	SCALE 比例	0.00 ± 0.01 (mm)	PART NAME 品名	Micro-Fit 3.0mm BMI Type 2XXXP STRAIGHT TYPE WITH RETENTION PEG TIN PLATING BLACK COLOR MATERIAL: LCP ROHS
DWG. 製圖	Betty	UNIT 單位	MM	REV. 版本	A
DATE 制表日	2013/10/29	PAGE 張數	1 OF 1	PART NO. 料號	W4232-XXPSTB00R