

# 品名 ACF-1204-P1-MC-S

## 1. 1.Explanation of part number :


**AC F — 1204 — P1 — MC — S —**  
 (1) (2) (3) (4) (5) (6) (7)

- (1) Product Type : Chip Antenna
- (2) Center Frequency/Band Code : F=433MHz group
- (3) Size Code : 12.0mm(Length) x 4.0mm(Width)
- (4) Design Revision Code : Rev.1
- (5) MC= Monopole Ceramic
- (6) Special Code : S=RoHS Compliant
- (7) Suffix For Special Requirements

## 2.Electrical Specification :


	Specification
Working Frequency Range	433-437 MHz
VSWR	2.0 max.
Polarization	Linear
Impedance	50Ω
Rated Power (max.)	3 Watts
Maximum Input Power	5 Watts for 5 minutes
Operation Temperature	-40° C ~ +125° C

Remark: The specification is defined based on the test board dimension as in below


UNLESS OTHER SPECIFIED TOLERANCES ON : X=N/A      X.X=N/A      X.XX=N/A ANGLES=N/A      HOLEDIA=N/A			<b>INPAQ TECHNOLOGY CO., LTD.</b>	
SCALE : N/A	UNIT : mm			
DRAWN BY : SHLEE	CHECKED BY : SHLEE	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION		
DESIGNED BY : William	APPROVED BY : MARCO			
TITLE : ACF-1204-P1-MC-S		DOCUMENT NO.	ENS070004730-000824000382	SPEC REV. <b>A0</b>

# 1. Antenna Drawing :

## CONSTRUCTION

Figure	PIN	Connection
	1	Feed termination
	2	Solder termination

## DIMENSION

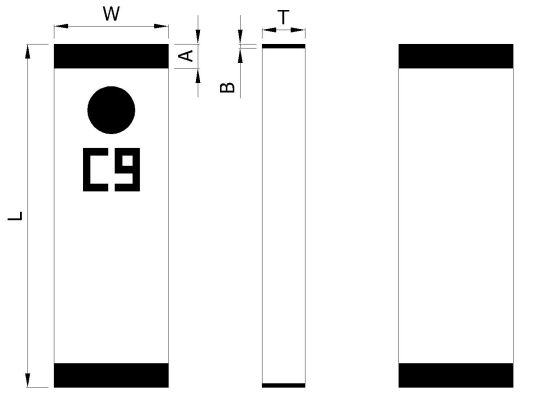Figure	Symbol	Dimen(mm)
	L	12.00 ± 0.25
	W	4.00 ± 0.25
	T	1.50 ± 0.15
	A	0.85 ± 0.15
	B	0.15 ± 0.10

UNLESS OTHER SPECIFIED TOLERANCES ON :  
 X=N/A      X.X=N/A      X.XX=N/A  
 ANGLES=N/A      HOLEDIA=N/A



**INPAQ TECHNOLOGY CO., LTD.**

SCALE : N/A      UNIT : mm  
 DRAWN BY : SHLEE      CHECKED BY : SHLEE  
 DESIGNED BY : William      APPROVED BY : MARCO


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : ACF-1204-P1-MC-S

DOCUMENT NO.	ENS070004730-000824000382	SPEC REV.
		A0


## 2. Performance Report :

### TEST BOARD

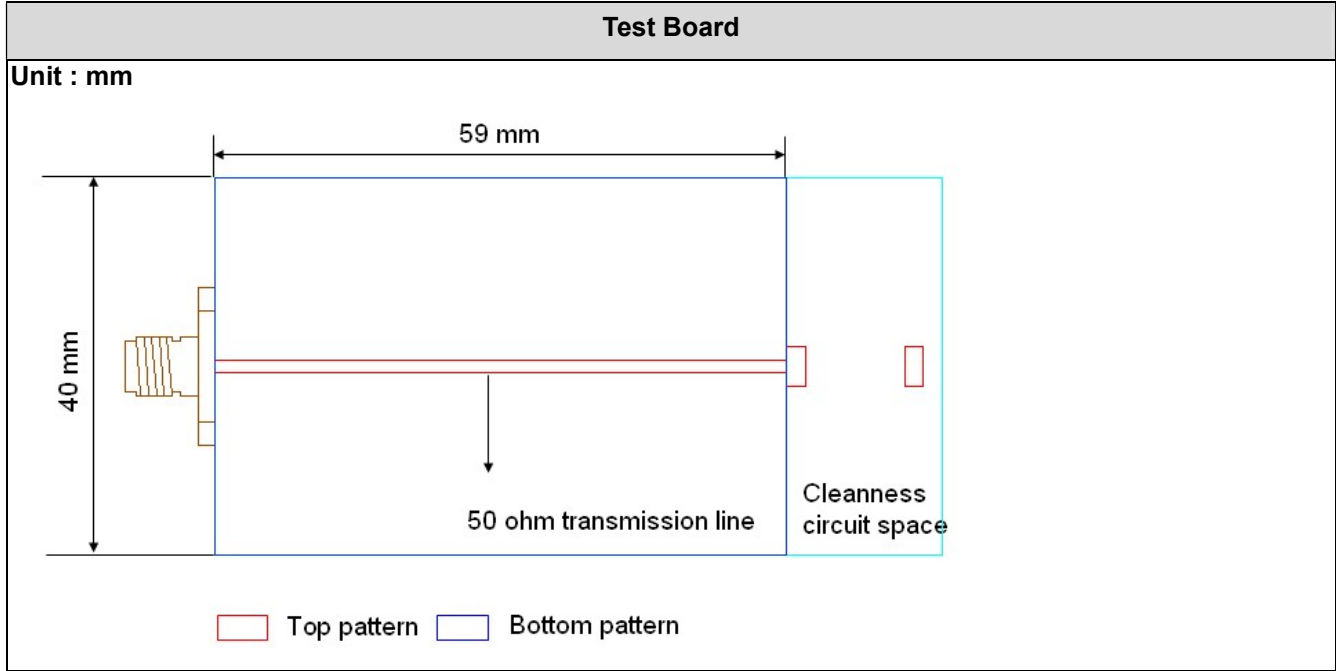


UNLESS OTHER SPECIFIED TOLERANCES ON : X=N/A      X.X=N/A      X.XX=N/A ANGLES=N/A      HOLEDIA=N/A		 INPAQ TECHNOLOGY CO., LTD.
SCALE : N/A	UNIT : mm	
DRAWN BY : SHLEE	CHECKED BY : SHLEE	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY : William	APPROVED BY : MARCO	
TITLE : ACF-1204-P1-MC-S	DOCUMENT NO.	ENS070004730-000824000382 SPEC REV. A0

S11 RETURN LOSS

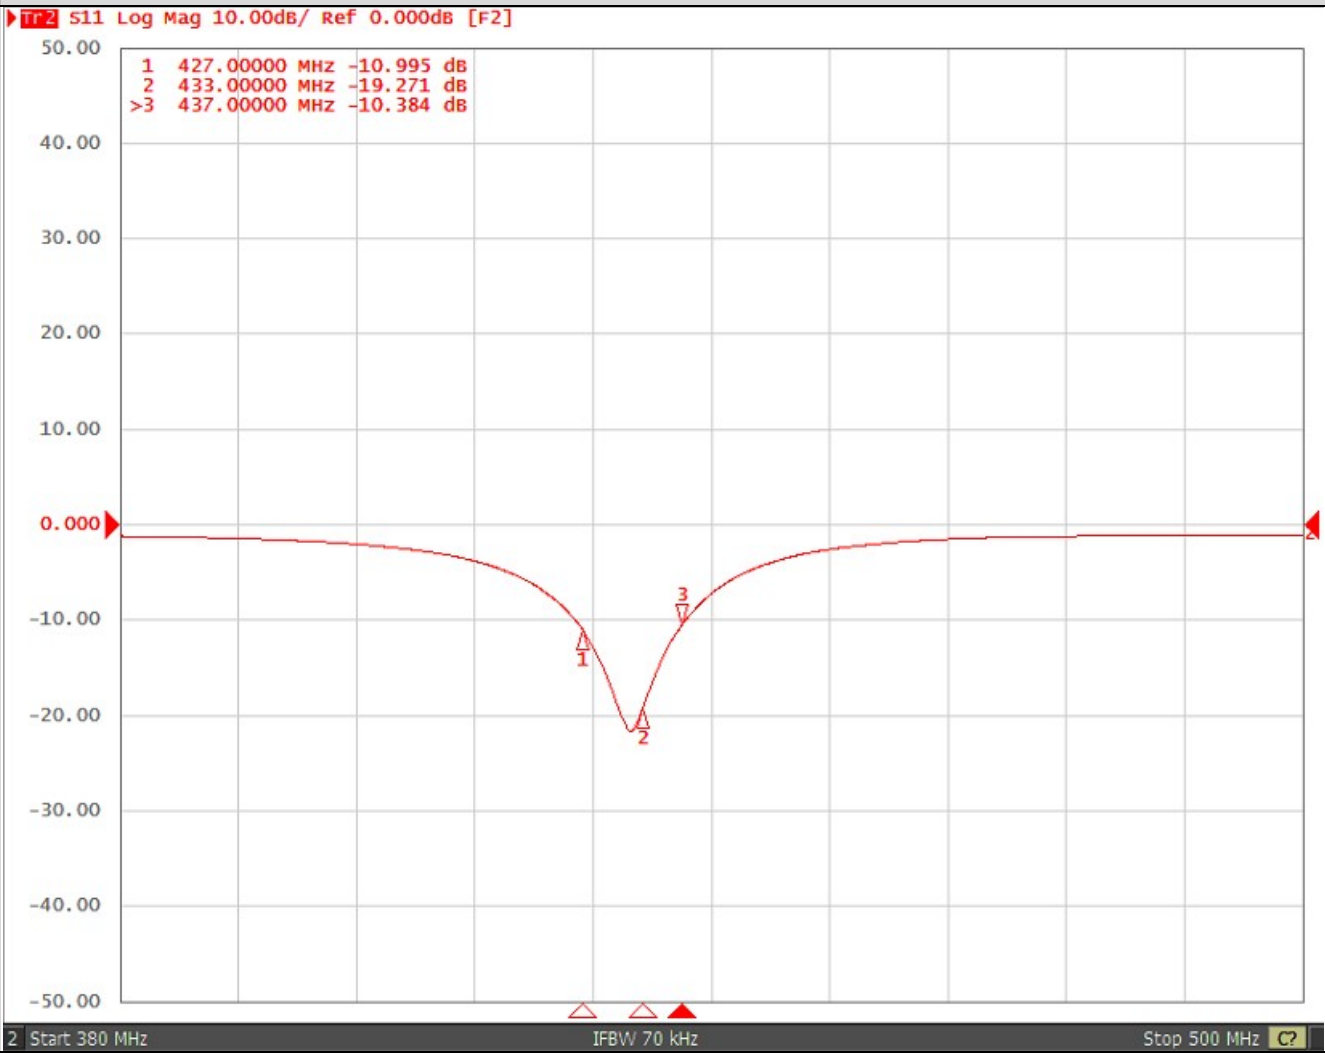

SOLDER LAND PATTERN DESIGN

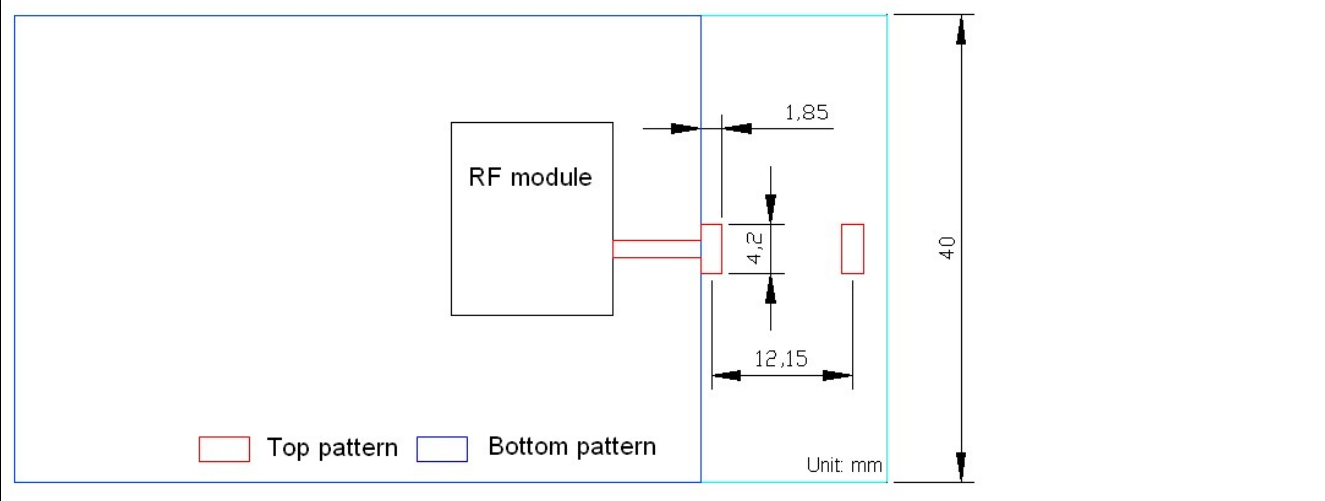

UNLESS OTHER SPECIFIED TOLERANCES ON :  
 X=N/A      X.X=N/A      X.XX=N/A  
 ANGLES=N/A      HOLEDIA=N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A      UNIT : mm  
 DRAWN BY : SHLEE      CHECKED BY : SHLEE  
 DESIGNED BY : William      APPROVED BY : MARCO

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION



TITLE : ACF-1204-P1-MC-S


DOCUMENT NO. ENS070004730-000824000382

SPEC REV. A0


**RADIATION PATTERN**

Radiation Pattern and Gain were dependent on measurement board design. The specification of ACF-1204-P1-MC-S antenna was measured based on the PCB size and installation position as shown in the below figure Test Board

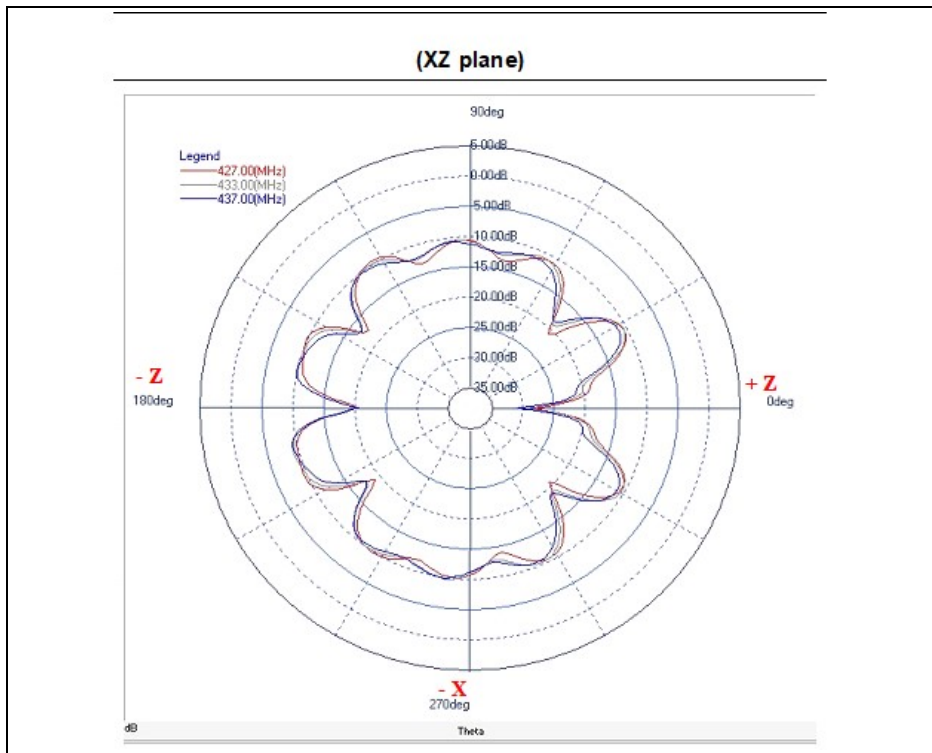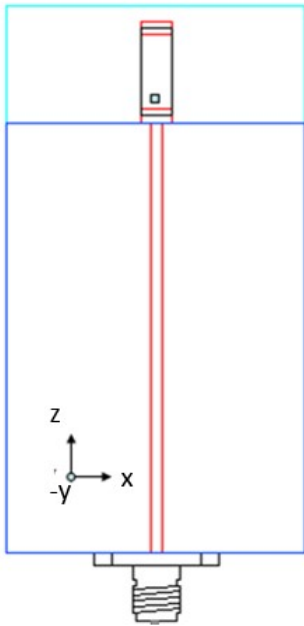


UNLESS OTHER SPECIFIED TOLERANCES ON :			<b>INPAQ TECHNOLOGY CO., LTD.</b>
X = N/A	X.X = N/A      X.XX = N/A		
ANGLES = N/A      HOLEDIA = N/A		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
SCALE : N/A	UNIT : mm		
DRAWN BY : SHLEE	CHECKED BY : SHLEE		
DESIGNED BY : William	APPROVED BY : MARCO	DOCUMENT NO.    ENS070004730-000824000382    SPEC REV.    A0	
TITLE : ACF-1204-P1-MC-S			

(YZ plane)

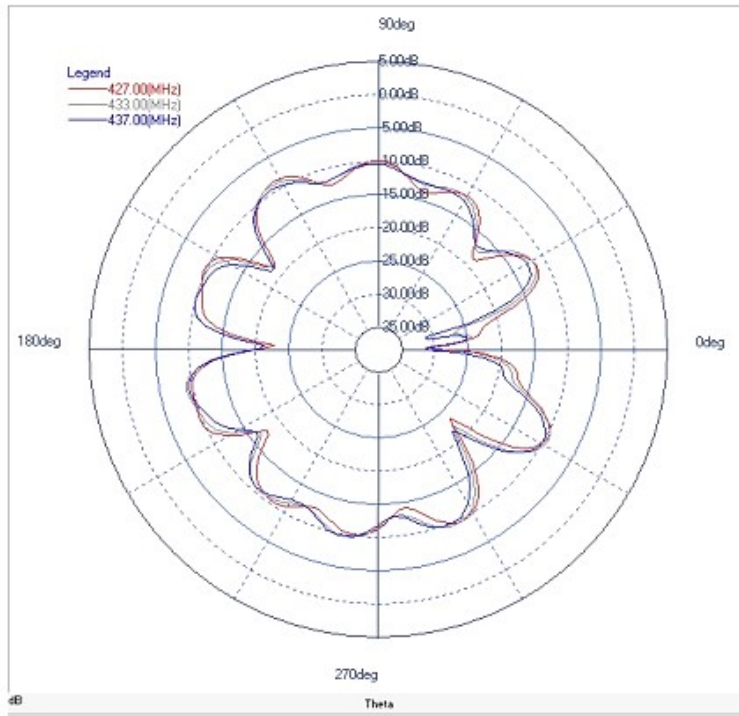

(XY plane)

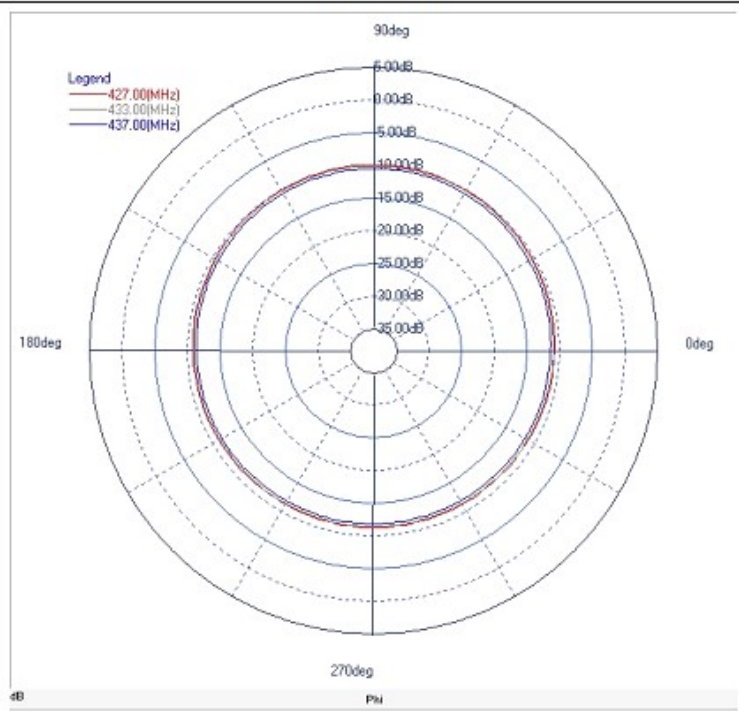

UNLESS OTHER SPECIFIED TOLERANCES ON :  
 X = N/A      X.X = N/A      X.XX = N/A  
 ANGLES = N/A      HOLEDIA = N/A



**INPAQ TECHNOLOGY CO., LTD.**

SCALE : N/A      UNIT : mm  
 DRAWN BY : SHLEE      CHECKED BY : SHLEE  
 DESIGNED BY : William      APPROVED BY : MARCO

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : ACF-1204-P1-MC-S

DOCUMENT NO. ENS070004730-000824000382

SPEC REV. A0

### 3. RELIABILITY TEST

Test item	Test condition / Test method	Specification
Solderability JIS C 0050-4.6 JESD22-B102D	*Solder bath temperature : 235 ± 5°C *Immersion time : 2 ± 0.5 sec Solder : Sn3Ag0.5Cu for lead-free	At least 95% of a surface of each terminal electrode must be covered by fresh solder.
Leaching <b>(Resistance to dissolution of metallization)</b> IEC 60068-2-58	*Solder bath temperature : 260 ± 5°C *Leaching immersion time : 30 ± 0.5 sec Solder : SN63A	Loss of metallization on the edges of each electrode shall not exceed 25%.
Resistance to soldering heat JIS C 0050-5.4	*Preheating temperature : 120~150°C, 1 minute. *Solder temperature : 270±5°C *Immersion time : 10±1 sec Solder : Sn3Ag0.5Cu for lead-free Measurement to be made after keeping at room temperature for 24±2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 125°C. Loss of metallization on the edges of each electrode shall not exceed 25%.
Drop Test JIS C 0044 Customer's specification.	*Height : 75 cm *Test Surface : Rigid surface of concrete or steel. *Times : 6 surfaces for each units : 2 times for each side.	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 125°C.
Vibration JIS C 0040	*Frequency : 10Hz~55Hz~10Hz(1min) *Total amplitude : 1.5mm *Test times : 6hrs.(Two hrs each in three mutually perpendicular directions)	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 125°C.
Adhesive Strength of Termination JIS C 0051- 7.4.3	*Pressurizing force : 5N(≤0603) ; 10N(>0603) *Test time : 10±1 sec	No remarkable damage or removal of the termination.

UNLESS OTHER SPECIFIED TOLERANCES ON :  
 X = N/A      X.X = N/A      X.XX = N/A  
 ANGLES = N/A      HOLEDIA = N/A



**INPAQ TECHNOLOGY CO., LTD.**

SCALE : N/A

UNIT : mm

DRAWN BY : SHLEE

CHECKED BY : SHLEE

DESIGNED BY : William

APPROVED BY : MARCO

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : ACF-1204-P1-MC-S

DOCUMENT NO.

ENS070004730-000824000382

SPEC REV.  
A0

Bending test JIS C 0051- 7.4.1	The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm/s per second until the deflection becomes 1mm/s and then pressure shall be maintained for 5±1 sec. Measurement to be made after keeping at room temperature for 24±2 hours	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 125°C.
Temperature cycle JIS C 0025	<ol style="list-style-type: none"> <li>30±3 minutes at -40°C±3°C,</li> <li>10~15 minutes at room temperature,</li> <li>30±3 minutes at +125°C±3°C,</li> <li>10~15 minutes at room temperature,</li> </ol> Total 100 continuous cycles Measurement to be made after keeping at room temperature for 24±2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 125°C.
High temperature JIS C 0021	*Temperature : 125°C±2°C *Test duration : 1000+24/-0 hours Measurement to be made after keeping at room temperature for 24±2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 125°C.
Humidity (steady conditions) JIS C 0022	*Humidity : 90% to 95% R.H. *Temperature : 40±2°C *Time : 1000+24/-0 hrs. Measurement to be made after keeping at room temperature for 24±2 hrs ※ 500hrs measuring the first data then 1000hrs data	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 125°C.
Low temperature JIS C 0020	*Temperature : -40°C±2°C *Test duration : 1000+24/-0 hours Measurement to be made after keeping at room temperature for 24±2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -40 ~ 125°C.

**SOLDERING CONDITION**

Typical examples of soldering processes that provide reliable joints without any damage are given in Fig 2



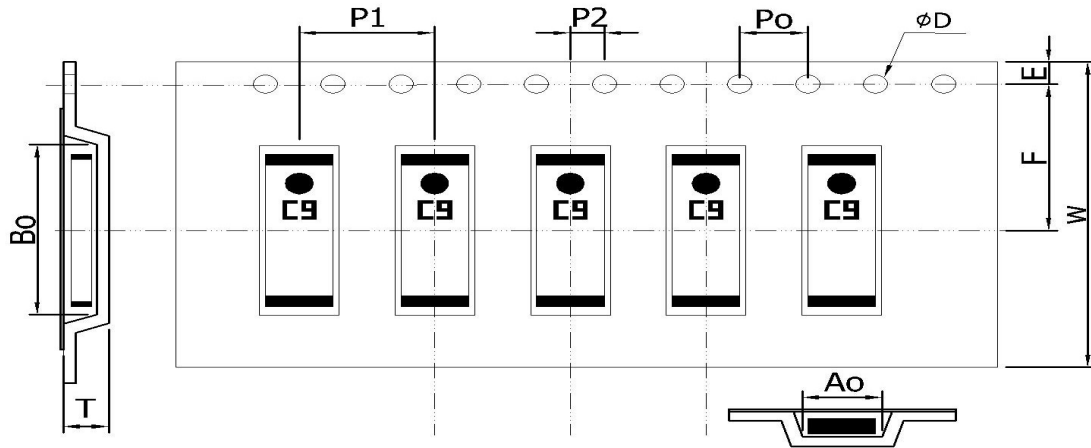


Fig 2. Infrared soldering profile

UNLESS OTHER SPECIFIED TOLERANCES ON : X = N/A      X.X = N/A      X.XX = N/A ANGLES = N/A      HOLEDIA = N/A		 <b>INPAQ TECHNOLOGY CO., LTD.</b>	
SCALE : N/A	UNIT : mm		
DRAWN BY : SHLEE	CHECKED BY : SHLEE	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DESIGNED BY : William	APPROVED BY : MARCO		
TITLE : ACF-1204-P1-MC-S		DOCUMENT NO. ENS070004730-000824000382	SPEC REV. A0




### 4. Package

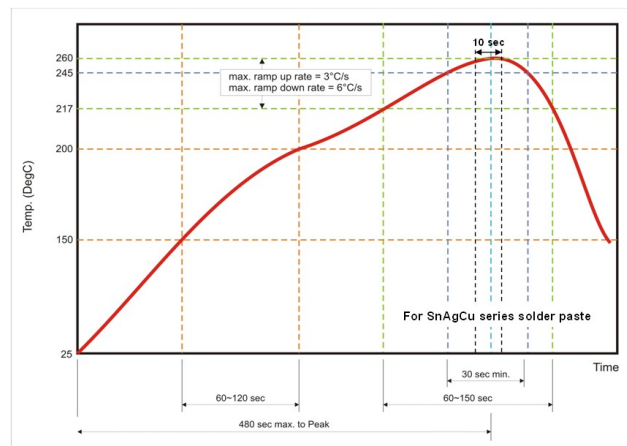

Plastic Tape specifications (unit :mm)


Index	Ao	Bo	φD	T	W
Dimension (mm)	4.70 ± 0.10	13.3 ± 0.10	1.50 + 0.10/-0	1.90 ± 0.10	24.0 ± 0.30
Index	E	F	Po	P1	P2
Dimension (mm)	1.75 ± 0.10	11.5 ± 0.10	4.00 ± 0.05	8.00 ± 0.10	2.0 ± 0.05

Reel dimensions

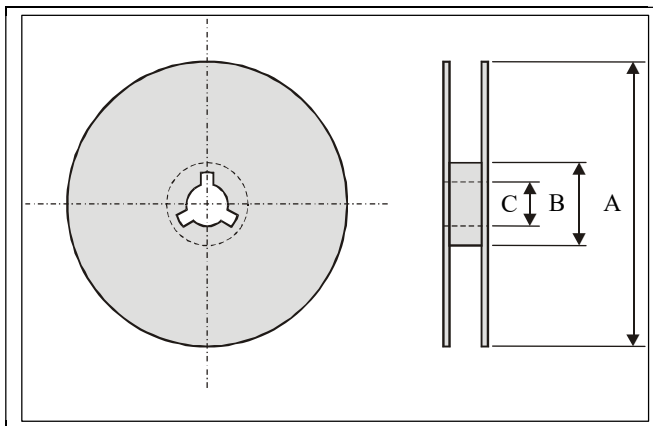

Index	A	B	C
Dimension (mm)	φ178	φ60.0	φ13.5

Typing Quantity: 2000 pieces per 7" reel

UNLESS OTHER SPECIFIED TOLERANCES ON : X=N/A      X.X=N/A      X.XX=N/A ANGLES=N/A      HOLEDIA=N/A		 <b>INPAQ TECHNOLOGY CO., LTD.</b>
SCALE : N/A	UNIT : mm	
DRAWN BY : SHLEE	CHECKED BY : SHLEE	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY : William	APPROVED BY : MARCO	
TITLE : ACF-1204-P1-MC-S		DOCUMENT NO. ENS070004730-000824000382
		SPEC REV. A0

**CAUTION OF HANDLING**


**Limitation of Applications**

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects, which might directly cause damage to the third party's life, body or property.

- (1) Aircraft equipment
- (2) Aerospace equipment
- (3) Undersea equipment
- (4) Medical equipment
- (5) Disaster prevention / crime prevention equipment
- (6) Traffic signal equipment
- (7) Transportation equipment (vehicles, trains, ships, etc.)
- (8) Applications of similar complexity and /or reliability requirements to the applications listed in the above.

**Storage condition**

- (1) Products should be used in 6 months from the day of WALSIN outgoing inspection.
- (2) Storage environment condition.
  - Products should be storage in the warehouse on the following conditions.
  - Temperature : +5 to +40°C
  - Humidity : 30 to 70% relative humidity
  - Don't keep products in corrosive gases such as sulfur. Chlorine gas or acid or it may cause oxidization of electrode, resulting in poor solderability.
  - Products should be storage on the palette for the prevention of the influence from humidity, dust and son on.
  - Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.
  - Products should be storage under the airtight packaged condition.

UNLESS OTHER SPECIFIED TOLERANCES ON : X=N/A            X.X=N/A            X.XX=N/A ANGLES=N/A            HOLEDIA=N/A			<b>INPAQ TECHNOLOGY CO., LTD.</b>	
SCALE : N/A	UNIT : mm			THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY : SHLEE	CHECKED BY : SHLEE			
DESIGNED BY : William	APPROVED BY : MARCO			
TITLE : ACF-1204-P1-MC-S		DOCUMENT NO.	ENS070004730-000824000382	SPEC REV. <b>A0</b>