

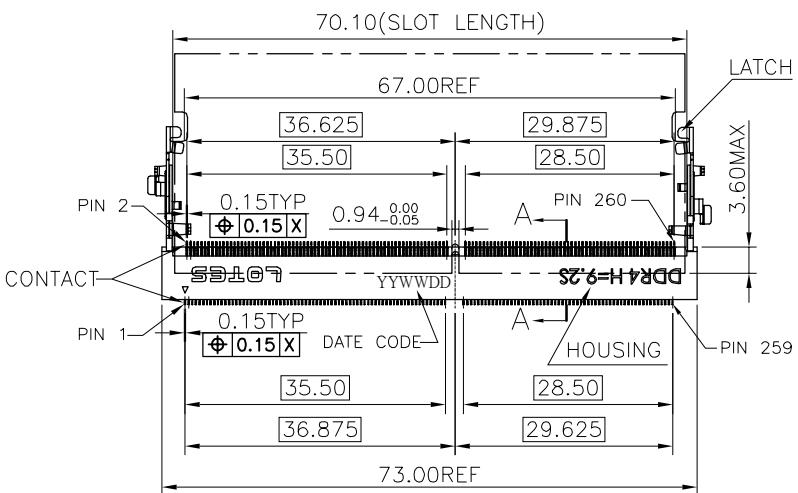
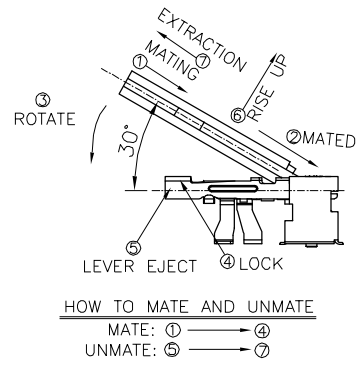
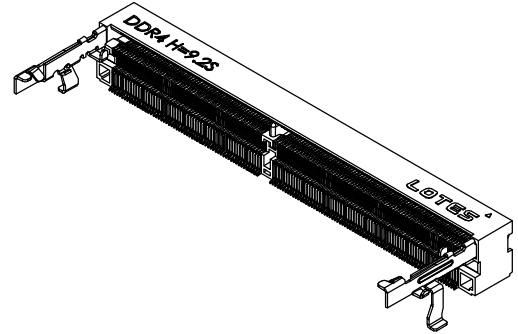
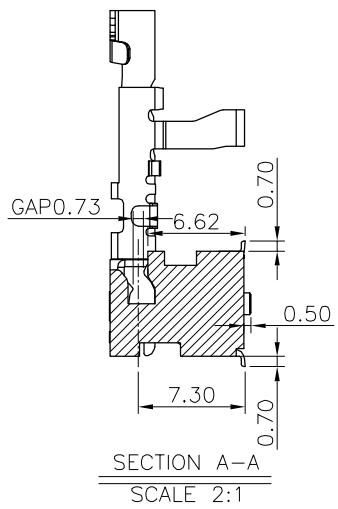
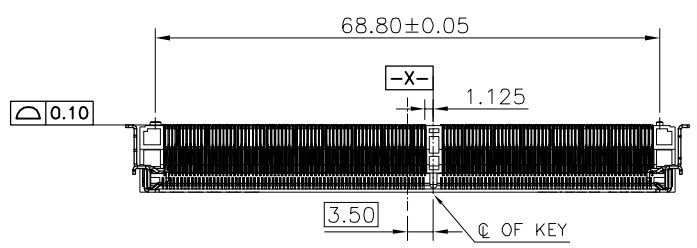


REV.	ECR/N NO./DESCRIPTION	DATE	DRAWN	CHECKED	APPROVE
2	SN19079	07/03'19	HBQ	Vito	Ford
2A	SR190**	10/26'19	XU	Vito	Frank
2B	SR200**	01/17'20	XU	Vito	Herch

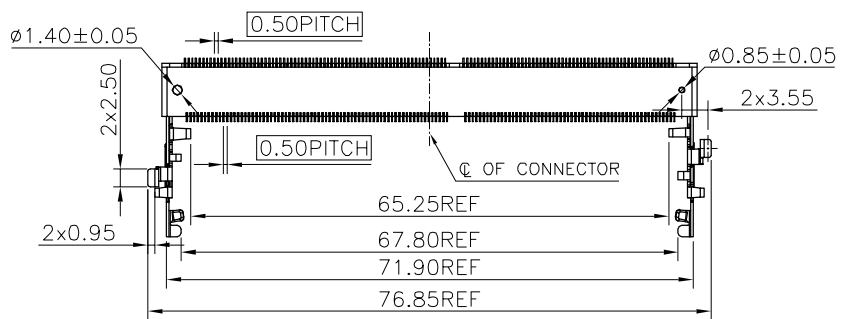

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. SEE TABLE	LOTES			
$X \pm 0.35$	$X.^{\circ} \pm 3^{\circ}$					APPROVED BY Barney
$.XX \pm 0.25$	$.X.^{\circ} \pm 2^{\circ}$		CHECKED BY Vito	DWG NO. AP-ADDR0110		
$.XXX \pm 0.15$	$.XX.^{\circ} \pm 1^{\circ}$	CUSTOMER DRAWING	REV			
SIZE A4	UNITS MM [INCH]	DRAWN BY XU		SHEET 1 / 5	SCALE 1 : 1	REV 2B

NOTES:

1.MATERIALS:

HOUSING: LCP,UL 94V-0.
 CONTACT: BRASS C2680.
 LATCH: STAINLESS STEEL SUS301.

2.FINISH:

1)CONTACT:NICKEL UNDER PLATING ON SOLDER ARER AND CONTACT AREA:DETAIL SEE TABLE
 GOLD PLATING ON SOLDER AREA:DETAIL SEE TABLE
 GOLD PLATING ON CONTACT AREA:DETAIL SEE TABLE
 2)LATCH:Ni 50u"MIN,NICKEL UNDER PLATING ON SOLDER ARER
 MATTE TIN 50u" MIN,MATTE TIN PLATING ON SOLDER ARER

3.ELECTRICAL PERFORMANCE

LLCR INITIAL 50mΩ MAX PER CONTACT.
 FINAL ΔLLCR=20mΩ MAX

4.MECHANICAL PERFORMANCE,

MATING & UNMATING FORCE: 6.1 Kgf MAX.


5.IR REFLOW:

THE PEAK TEMPRATURE ON THE BOARD SHALL BE
 MAINTAINED FOR 10 SECONDS AT 260±5°C.

6. DC: XXXXXX




7.PRODUCT NUMBER NOTE:ADDR****-****

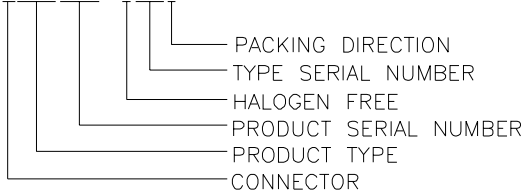


8.RoHS COMPLIANT.
 HF COMPLIANT.

TABLE:

NO.	PART NO.	COLOR	AU DESCRIPTION	NICKEL DESCRIPTION
1	ADDR0110-P005A	BLACK	GOLD G/F ON CONTACT AREA GOLD G/F ON SOLDER AREA	50u" MIN NICKEL UNDER PLATED
2	ADDR0110-P006A	BLACK	GOLD 10u" ON CONTACT AREA GOLD G/F ON SOLDER AREA	
3	ADDR0110-P007A	BLACK	GOLD 15u" ON CONTACT AREA GOLD G/F ON SOLDER AREA	
4	ADDR0110-P008A	BLACK	GOLD 30u" ON CONTACT AREA GOLD G/F ON SOLDER AREA	
5	ADDR0110-P009A	BLACK	GOLD 15u" ON CONTACT AREA GOLD G/F ON SOLDER AREA	90u" MIN NICKEL UNDER PLATED
6	ADDR0110-P010A	WHITE	GOLD G/F ON CONTACT AREA GOLD G/F ON SOLDER AREA	50u" MIN NICKEL UNDER PLATED
7	ADDR0110-P011A	WHITE	GOLD 10u" ON CONTACT AREA GOLD G/F ON SOLDER AREA	
8	ADDR0110-P012A	WHITE	GOLD 15u" ON CONTACT AREA GOLD G/F ON SOLDER AREA	
9	ADDR0110-P013A	WHITE	GOLD 30u" ON CONTACT AREA GOLD G/F ON SOLDER AREA	

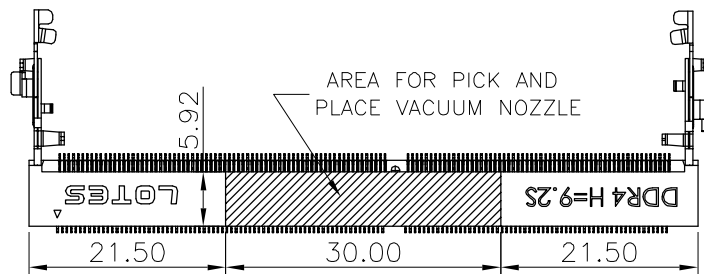



GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. SEE TABLE	LOTES			
X ± 0.35	X.° ± 3°					
.XX ± 0.25	.X.° ± 2°	APPROVED BY Barney	TITLE SODDR4 9.2H 260 PIN STD TYPE			
.XXX ± 0.15	.XX.° ± 1°	CHECKED BY Vito	DWG NO. AP-ADDR0110			
CUSTOMER DRAWING		DRAWN BY XU		SHEET 2 / 5	SCALE 5 : 4	REV 2B
SIZE A4	UNITS MM[INCH]					

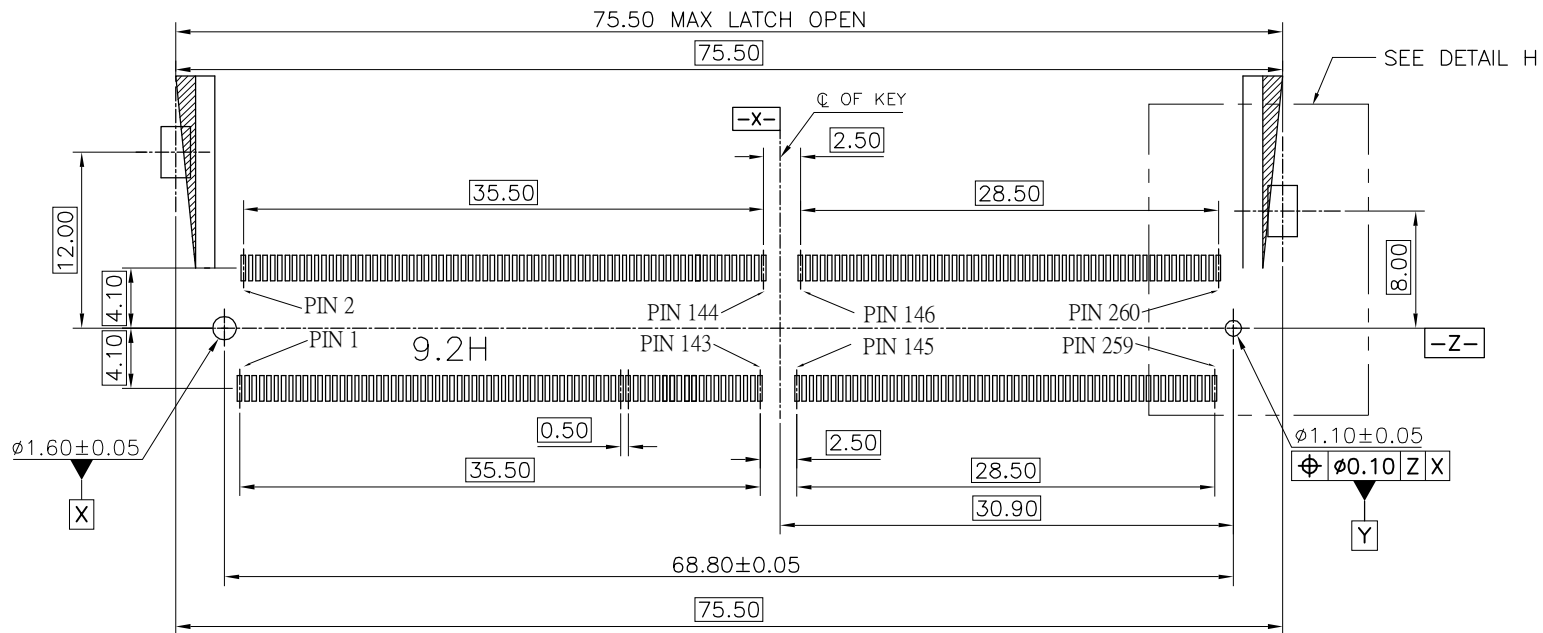


SCALE 2:1

TOP VIEW
RECOMMEND PCB LAYOUT (STANDARD)
THE TOLERANCES UNLESS SPECIFIED IS $\pm 0.05\text{MM}$

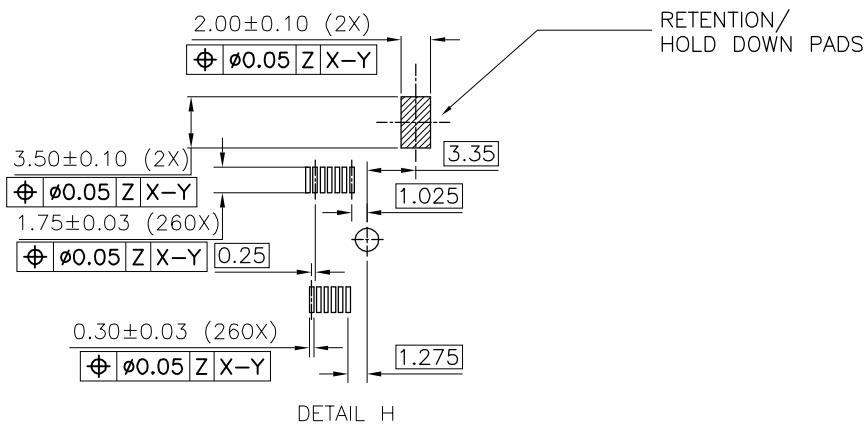

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. SEE TABLE	LOTES			
X ± 0.35	X° ± 3°					
.XX ± 0.25	.X° ± 2°	APPROVED BY Barney	TITLE SODDR4 9.2H 260 PIN STD TYPE			
.XXX ± 0.15	.XX° ± 1°	CHECKED BY Vito	DWG NO. AP-ADDR0110			
CUSTOMER DRAWING		DRAWN BY XU		SHEET 3 / 5	SCALE 1 : 1	REV 2B
SIZE A4	UNITS MM [INCH]					

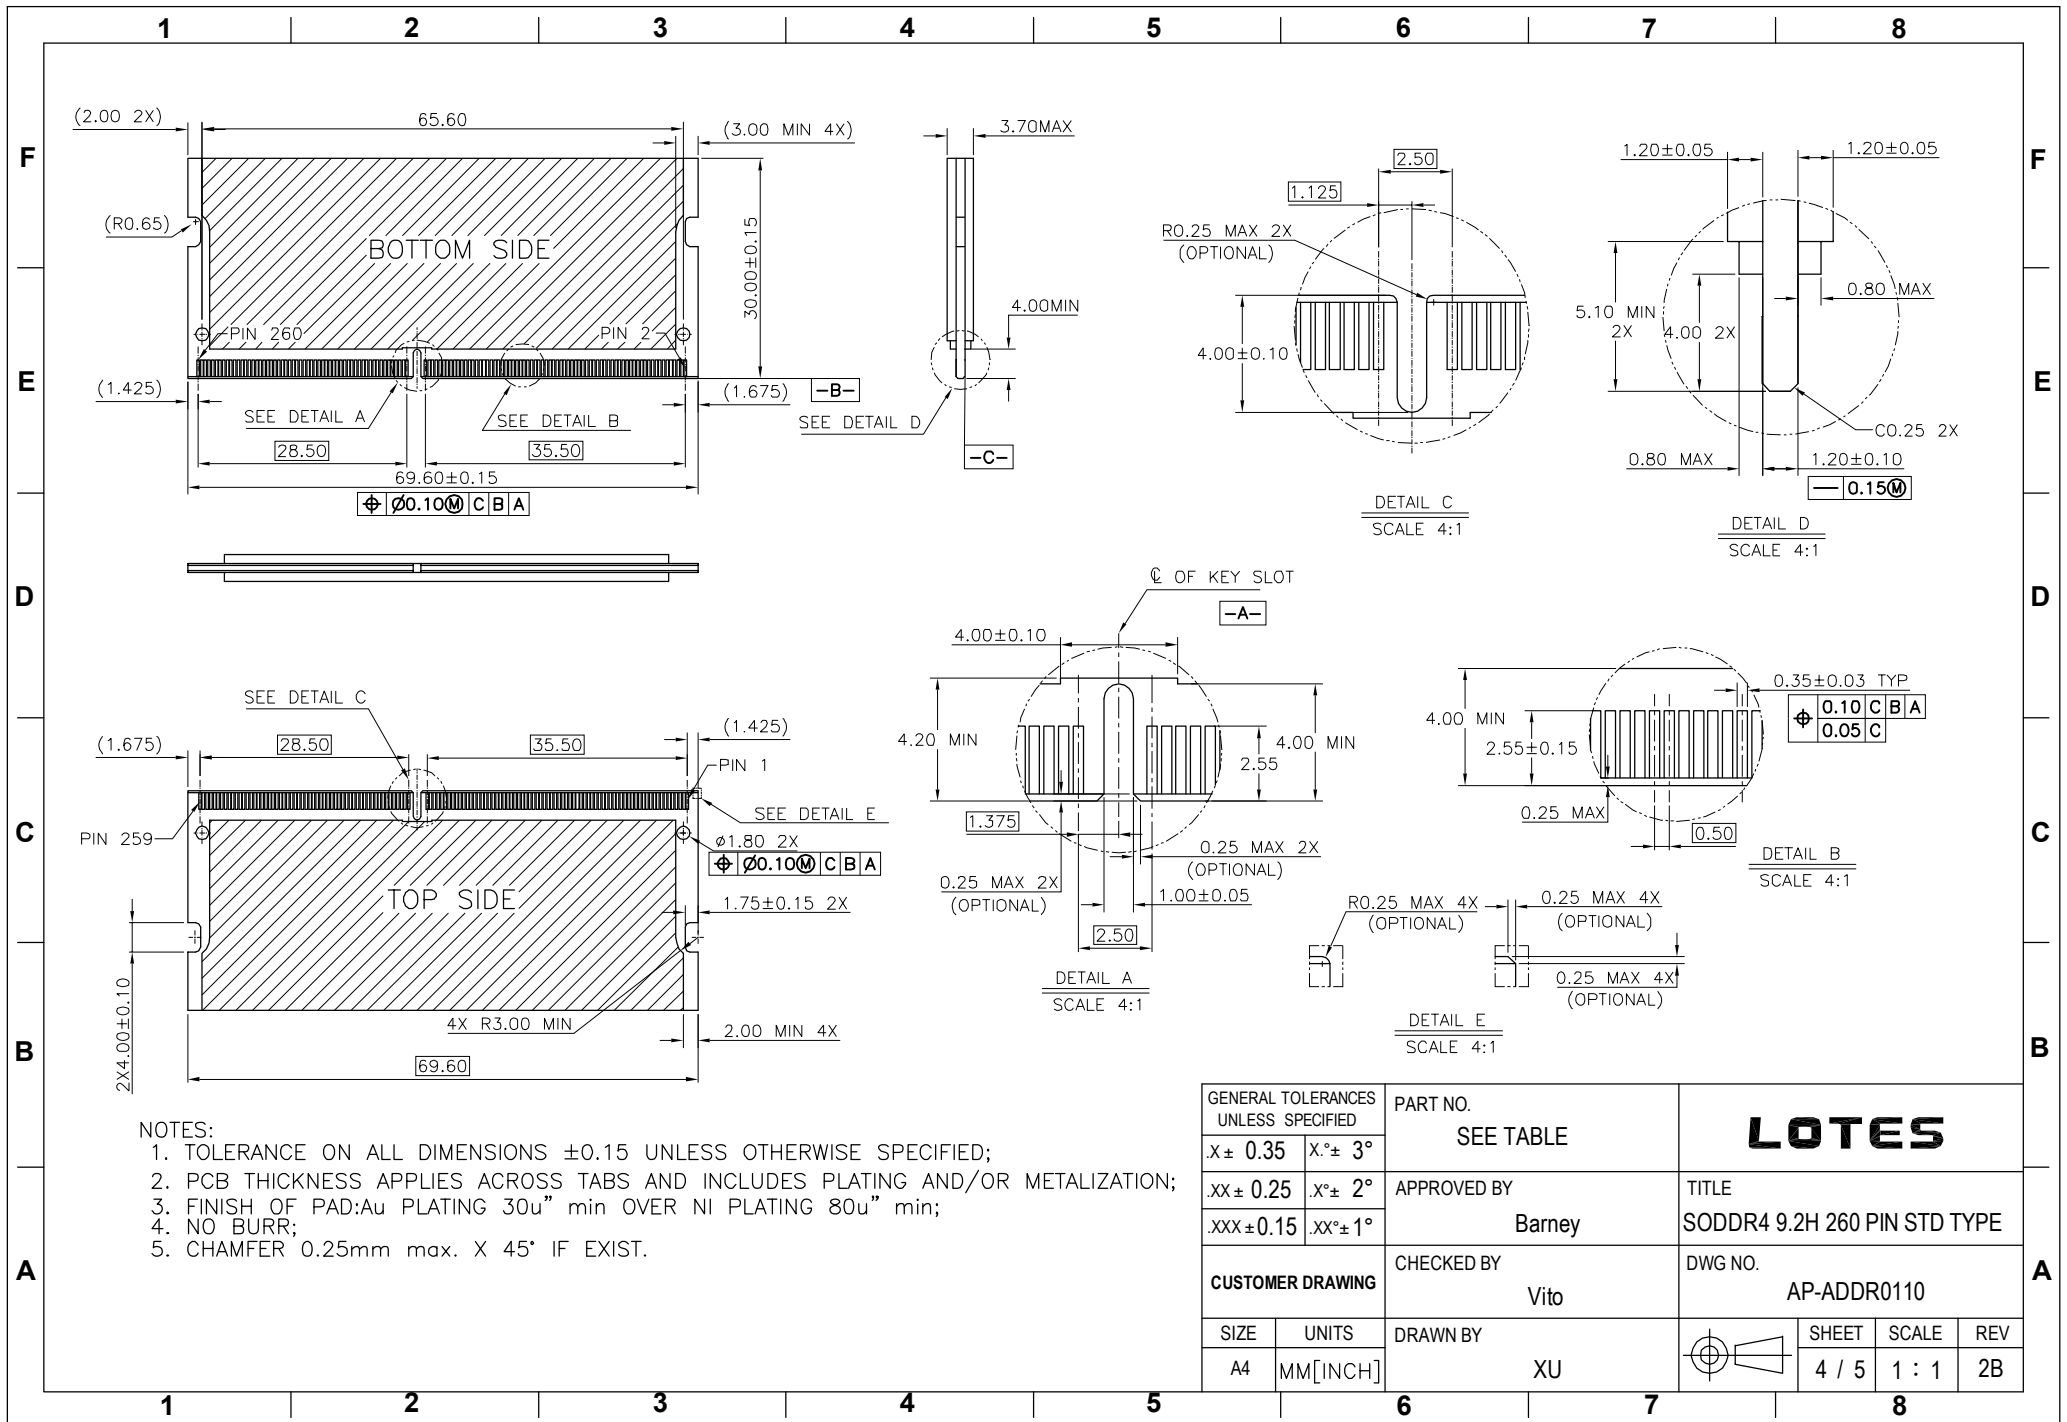





NOTES:

1. TOLERANCE ON ALL DIMENSIONS ± 0.15 UNLESS OTHERWISE SPECIFIED;
2. PCB THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION;
3. FINISH OF PAD: Au PLATING 30u" min OVER NI PLATING 80u" min;
4. NO BURR;
5. CHAMFER 0.25mm max. X 45° IF EXIST.

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. SEE TABLE	LOTES			
X ± 0.35	X.° ± 3°					
.XX ± 0.25	.X.° ± 2°	APPROVED BY	TITLE			
.XXX ± 0.15	.XX.° ± 1°	Barney	SODDR4 9.2H 260 PIN STD TYPE			
CUSTOMER DRAWING		CHECKED BY	DWG NO.			
		Vito	AP-ADDR0110			
SIZE	UNITS	DRAWN BY		SHEET	SCALE	REV
A4	MM [INCH]	XU		4 / 5	1 : 1	2B

1 2 3 4 5 6 7 8

F
E
D
C
B
A

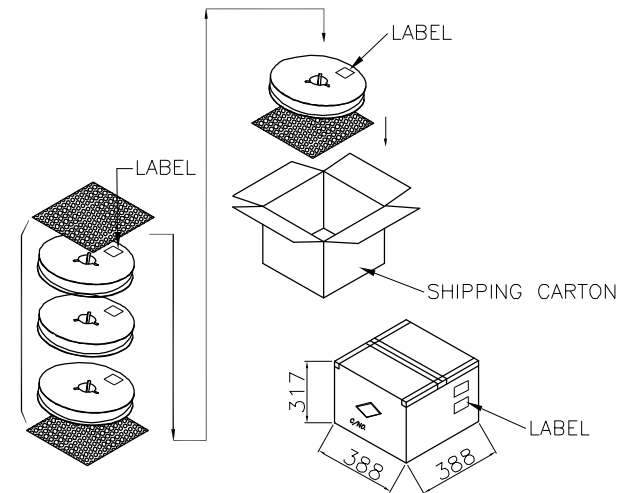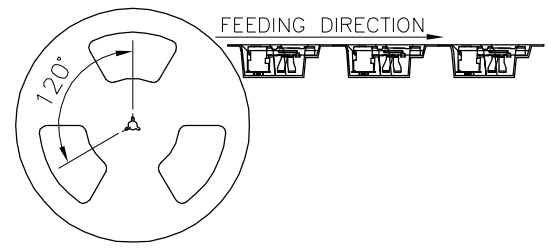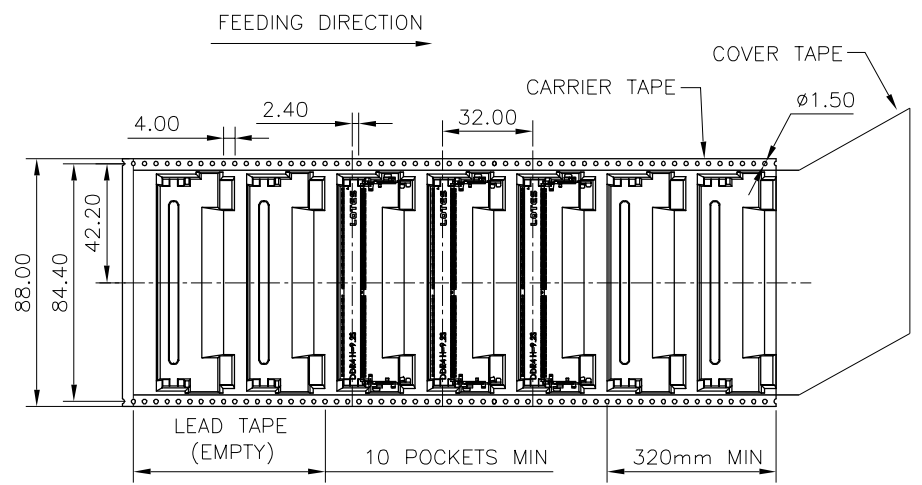

- NOTES:
- MATERIAL :
 - 1.1 CARRY TAPE: PS
 - 1.2 COVER TAPE: PET
 - 1.3 SHIPPING CARTON: CORRUGATED FIBER
 - DIMENSION :
 - 2.1 REEL: W=88.0, øA=380
 - 2.2 SHIPPING CARTON: L=388, W=388, H=317 (INNER)
 - QUANTITY :
 - 3.1 PRIMARY PACKING: 220 PCS/REEL
 - 3.2 SECONDARY PACKING: 3 REELS/CARTON(660PCS)
 - PEELING RESISTANCE: 20gf~120gf.
 - PEELING SPEED: 300mm/minutes.

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. SEE TABLE	LOTES			
X± 0.35	X.º± 3º					
.XX± 0.25	.Xº± 2º	APPROVED BY Barney	TITLE SODDR4 9.2H 260 PIN STD TYPE			
.XXX± 0.15	.XXº± 1º					
CUSTOMER DRAWING		CHECKED BY Vito	DWG NO. AP-ADDR0110			
SIZE	UNITS	DRAWN BY XU		SHEET	SCALE	REV
A4	MM			5 / 5	N/A	2B

1 2 3 4 5 6 7 8